
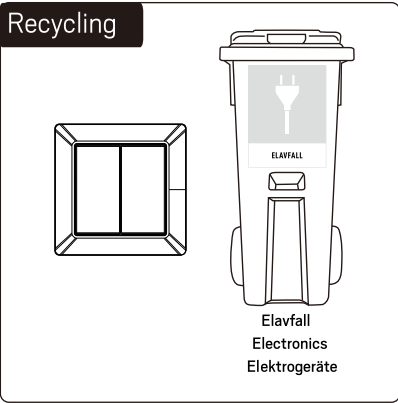


Scenario Switch Casambi

hidealite

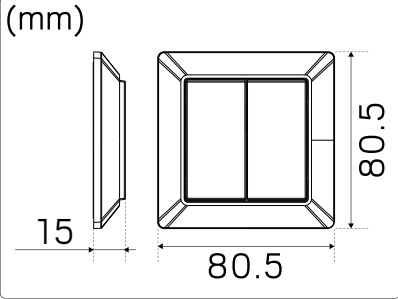

Note!

Different materials affect Casambi Mesh signals in various ways:

- **Metal:** Blocks or weakens signals significantly.
- **Concrete, Brick:** Reduce signal range.
- **Wood, Glass, Plastic:** Minimal impact.

Proper placement is vital for strong signals, avoiding obstructions like metal and dense walls to ensure reliable connectivity. Care to check signal levels.

For optimal performance, we recommend maintaining an approximate distance of 20meters between Casambi devices under good conditions. This helps ensure strong and reliable connectivity.



To be used through APP available on Apple Store and Play Store for iOS and Android.

- Features**
- Battery powered, Ultra-low power consumption
 - Easy & quick pairing through APP
 - Standard size, compatible with most of the existing EU size frame
 - On-board antenna

Battery Warnings & Safety

Warnings and Statements:

This product contains a CR Coin Cell Lithium Battery and meets the requirements of the **16 CFR Part 1263**. For your safety and to ensure proper operation, please carefully read and understand the following warnings and statements.

E-nr	Snro	El.nr	GTIN	Name
13 613 69	20 115 06	14 060 31	7392971158822	Scenario Switch Casambi White
13 613 70	20 115 07	14 060 32	7392971158839	Scenario Switch Casambi Black



For explanation of symbols see www.hidealite.se

SAFETY INSTRUCTIONS

en Read these instructions carefully before commencing installation and retain for future reference. All connections to the driver must only be made by a qualified electrician or a person with the necessary expertise in electrical installation in accordance with the relevant rules and standards. Make sure that the power is off before installation or maintenance.

sv Läs dessa instruktioner före installationen påbörjas och lämna den vidare till brukaren av anläggningen. All anslutning till drivdonet får endast utföras av behörig elektriker eller person med nödig kännedom om elektrisk installation i enlighet med gällande regler och standard. Se till att spänningen är frånslagen före installation eller underhåll.

fi Lue nämä ohjeet ennen asentamista ja luovuta ohjeet valaisimen seuraavalle käyttäjälle. Kytkennot ohjaimen saa tehdä ainoastaan pätevä sähköasentaja tai sähköasennukset hallitseva henkilö voimassa olevien määräysten ja standardien mukaisesti. Varmista, että jännite on kytketty päältä ennen asennusta ja huoltoa.

no Les disse instruksjonene før du starter installeringen, og gi den deretter videre til anleggets bruker. All tilkobling til omformeren skal utføres av godkjent elektriker eller person med nødvendig kunnskap om elektrisk installasjon i henhold til gjeldende forskrifter og standard. Sørg for at strømmen er koblet fra før installering og ved vedlikehold.


da Læs disse anvisninger før du starter installationen og aflever vejledningen til anlæggets bruger. Alle tilslutninger på konverteren skal udføres af en autoriseret elinstallatør i overensstemmelse med gældende regler og standarder. Afbryd spænding før installation og vedligeholdelse.

de Lesen Sie diese Anweisungen sorgfältig, bevor Sie mit der Installation beginnen, und bewahren Sie sie für späteres Nachschlagen auf. Sämtliche Anschlüsse am Treiber dürfen nur von einem qualifizierten Elektriker oder einer Person mit der notwendigen Fachkenntnis im Bereich Elektroinstallationen und in Übereinstimmung mit den geltenden Richtlinien und Normen vorgenommen werden. Stellen Sie vor Installations- oder Wartungsarbeiten sicher, dass keine Spannung mehr anliegt.

pl Przed przystąpieniem do instalacji należy się uważnie zapoznać z instrukcją i zachować ją na przyszłość. Wszystkie połączenia prowadzące do sterownika muszą zostać wykonane przez wykwalifikowanego elektryka bądź osobę posiadającą niezbędną wiedzę specjalistyczną w zakresie instalacji elektrycznych zgodnie z obowiązującymi przepisami i normami. Przed instalacją lub konserwacją wyłączyć zasilanie.

fr Lisez attentivement ces consignes avant de commencer l'installation. Pensez également à vous y reporter ultérieurement. Tous les raccordements au moteur doivent uniquement être effectués par un électricien qualifié ou par un individu qui dispose de l'expertise requise en matière d'installation électrique, conformément aux normes et aux règles pertinentes. Veillez à couper le courant avant l'installation et toute opération de maintenance.

Product info

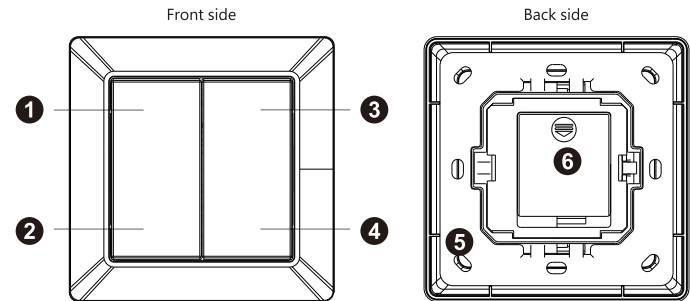


- ① ~ ④ Four button functions are configured through APP.
- ⑤ The switch can be fixed on the wall with 3M glue or screw.
- ⑥ Battery: CR2430. Before the first use, please open the battery cover and remove the protective film.
- NOTE:** In order for switches to operate as configured, please make sure the "I" label is placed above the "O" label.

Product Data

Power Supply	3VDC (1xCR2430 Battery Included)
Transmission Frequency	2.4GHz
Transmission Range	Max.20m (open field)
Protection Type	IP20
Dimming Range	0.1%-100%
Dimensions	80.5x80.5x15mm

Installation

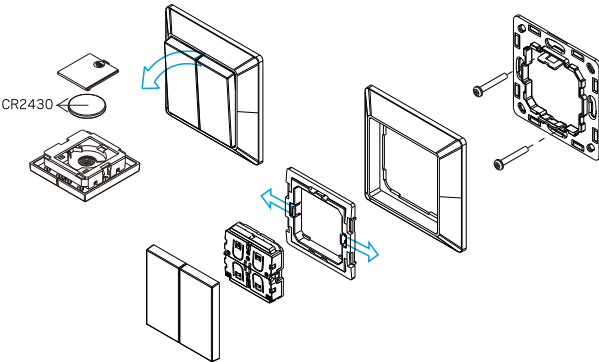

⚠ WARNING

- **INGESTION HAZARD:** This product contains a button cell or coin battery.
- **DEATH** or serious injury can occur if ingested.
- A swallowed button cell or coin battery can cause **Internal Chemical Burns** in as little as **2 hours**.
- **KEEP** new and used batteries **OUT OF REACH OF CHILDREN**
- **Seek immediate medical attention** if a battery is suspected to be swallowed or inserted inside any part of the body.