hidealite | Elektro Elco AB Tallvägen 5, 564 35 Bankeryd, Sweden
Phone + 46(0)36 290 60 00 | info@elco.se | www.hidealite.com





SPOT MINI VP IP44 WHITE 3000K

Small LED luminaire with energy efficient LED light source of 1.2W/350mA with 60° diffusion angle. Simple installation in flexi-pipe 16 or in hole dimension from 16-20 mm using the spring included. Beautiful as decorative lighting recessed into shelves and window nooks in public and private areas. Comes with 2 m pre-wired cable. Connects to DC converter via series connection from plus to minus. Drivers ordered separately and are available with or without dimming possibility.

DESCRIPTION

GTIN:	7392971122212
Item Name:	Spot Mini VP IP44 White 3000K
Warranty:	5 years

LIGHT TECHNICAL DATA

Max. Luminaire Lumen (lm):	85
Light Source:	LED
Replaceability:	Non-replaceaable LED
LED Colour:	Warm White
Colour Temperature (K):	3000
Colour Rendering Index (Ra):	>80
Colour Consistency (SDCM):	3
Luminous Intensity (cd):	80
Beam Angle (°):	60
Life Time:	L70 30 000h Ta 25°C
Nominel Life Time (h):	30000

TECHNICAL DATA

Power LED (W):	1,2
Max. Power Luminaire (W):	1,2
Max. Efficiency Luminaire (lm/W):	70,8
Containing light source energy efficiency class (EU) 2019/2015:	F
Eprel registration number:	1366955

OPERATION AND CONNECTION

Dimmable:	Yes
Driver Included:	No
Driver Model:	Constant Current
Connection (type):	Mini Contact
Length Connection (cm):	200
Constant Current (mA):	350
Operating Temperature:	-25...+40°C

COLOR AND MATERIAL

Material:	Aluminium
Color:	White

MEASUREMENT AND INSTALLATION

Operating Environment:	Indoor / bathroom (ceiling area 1)
IP Degree of Protection:	44
Protection Class:	III
Installation:	Built-in
Mounting Installation:	Sealing Ring, Tension Spring
Ceiling Thickness Interval (mm):	5mm
Fire Safety Marks:	Not in insulation without protection cover
Approval Marks:	CE
Height (mm):	19
Diameter (mm):	30
Weight (kg):	0,05
Min. Built-in (mm):	Ø15x18
Height Recessed Part (mm):	15
Height Exterior Part (mm):	4
Built-in Ø (mm):	16-20mm














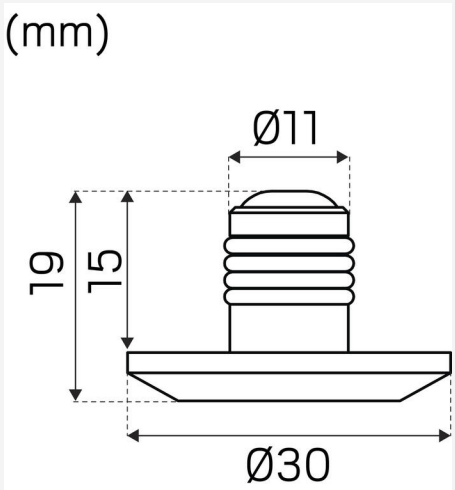


(mm)
Ø11
19
15
Ø30

