hidealite | Elektro Elco AB Tallvägen 5, 564 35 Bankeryd, Sweden
Phone + 46(0)36 290 60 00 | info@elco.se | www.hidealite.com





KLOSS

Compact and versatile LED luminaire with On/Off switch for both sliding and hinged doors in wardrobes, store rooms, closets, etc. The wardrobe luminaire has been given new life with modern LED technology. Simple installation thanks to separate rear element with dual cable bushings and removable push-in, loop-in, loop-out terminal block. Knockouts for surface-mounted cable routing and flex hose. This luminaire has an integrated 230V LED module for simple installation.

DESCRIPTION

GTIN:	7392971134321
Item Name:	Kloss
Warranty:	5 years

LIGHT TECHNICAL DATA

Max. Luminaire Lumen (lm):	600
Light Source:	LED
Replaceability:	Non-replaceable LED and control gear
LED Colour:	Warm White
Colour Temperature (K):	3000
Colour Rendering Index (Ra):	>80
Colour Consistency (SDCM):	4
Luminous Intensity (cd):	160
Beam Angle (°):	120
Light sharing:	Symmetric
Light Outlet:	Direct
Number of Lamps (pcs):	1
Number of LED (pcs):	30
Life Time:	L70 50 000h Ta 25°C
Nominel Life Time (h):	50000
Lumen maintenance 50 000h:	L73
LLMF @ 50 000h:	0.73
Flicker (PstLM):	0,038
Stroboscopic effect (SVM):	0

TECHNICAL DATA

Voltage (type):	AC
Voltage Interval (V):	220...240V
Voltage Nominal (V):	230
Power LED (W):	5
Max. Power Luminaire (W):	6,5
Max. System Power (W):	6,5
Max. Efficiency Luminaire (lm/W):	92,3
Max. Efficiency System (lm/W):	92,3
Containing light source energy efficiency class (EU) 2019/2015:	E
Eprel registration number:	1270372

OPERATION AND CONNECTION

Dimmable:	No
Type of Dimming:	OnOff
Connection (type):	Quick Terminal
Connection (mm2):	3x0,5-1,5
Through Wiring:	Yes
Strain Relief:	Yes
Standby Power:	0
Operating Temperature:	-20...+40°C
Max. Tc (°C):	85

COLOR AND MATERIAL

Material:	ABS plastic
Material Housing/Enclosure:	Polycarbonate
Color:	White
Environmental Assessment:	Byggvarubedömningen

MEASUREMENT AND INSTALLATION


Operating Environment:	Indoor / dry locations
IP Degree of Protection:	20
Protection Class:	II
Installation:	Surface mounted
Mounting Installation:	Screw Mounting
Fire Safety Marks:	MM-mark
Approval Marks:	CE
Filament Test IEC 695-2-1(°C):	650
Length (mm):	140
Height (mm):	58
Depth (mm):	55
Weight (kg):	0,151







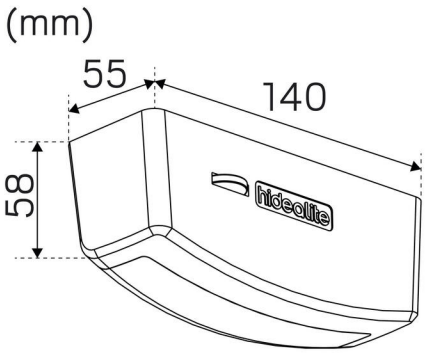


(mm)
55
140
58
hideolite


B