hidealite | Elektro Elco AB Tallvägen 5, 564 35 Bankeryd, Sweden
Phone + 46(0)36 290 60 00 | info@elco.se | www.hidealite.com





SPOTLIGHT GARDEN KIT

Kit with striking mini spots with low energy consumption. Small, adjustable and stylish luminaires for illuminating smaller objects in the garden, such as flower beds or small bushes and trees. Comes with 0.5 m rubber cable with screw connector and ground spike. The kit comprises 2x IP67 luminaires, 2x ground spikes, 2x T-connectors, 1x 1 m extension cable with quick connector and 1x plug-in transformer IP44 with 5 m cable. Can be combined with Decklight Garden thanks to the common coupling system.

DESCRIPTION

GTIN:	7392971130149
Item Name:	Spotlight Garden Kit
Warranty:	5 years

LIGHT TECHNICAL DATA

Max. Luminaire Lumen (lm):	40
Light Source:	LED
Replaceability:	Non-replaceaable LED, Replaceable Control gear by end-user
LED Colour:	Warm White
Colour Temperature (K):	3000
Colour Rendering Index (Ra):	>80
Colour Consistency (SDCM):	3
Luminous Intensity (cd):	2x150
Beam Angle (°):	36
Light sharing:	Symmetric
Light Outlet:	Indirect
Number of Lamps (pcs):	1
Number of LED (pcs):	1
Life Time:	L70 50 000h Ta 25°C
Nominel Life Time (h):	50000
Lumen maintenance 50 000h:	L70
LLMF @ 50 000h:	0.7
Life Time Driver:	50 000h/10%

TECHNICAL DATA

Adjustable:	Yes
Tiltable (°):	90
Rotatable (°):	360
Voltage (type):	AC
Voltage Interval (V):	220...240V
Voltage Nominal (V):	230
Line Frequency (Hz):	50
Voltage Forward (Vf):	0,8
Max. Power Luminaire (W):	0,8
Max. System Power (W):	2,1
Max. Efficiency Luminaire (lm/W):	50
Max. Efficiency System (lm/W):	19,0

OPERATION AND CONNECTION



Dimmable:	No
Type of Dimming:	OnOff
Driver Included:	Yes
Driver Model:	Constant Voltage
Driver Type:	Stand Alone
Connection (type):	Cord Set
Operating Temperature:	-15...+40°C
Max. Tc (°C):	40

COLOR AND MATERIAL

Material:	Aluminium
Color:	Aluminum
Environmental Assessment:	Byggvarubedömningen

MEASUREMENT AND INSTALLATION


Operating Environment:	Indoor / wet locations, Outdoor
IP Degree of Protection:	44
Protection Class:	III
Installation:	Surface mounted
Mounting Installation:	Screw Mounting, Ground Spike
Approval Marks:	CE
Impact Strength:	IK10
Length (mm):	70
Height (mm):	70
Diameter (mm):	30
Weight (kg):	0,75











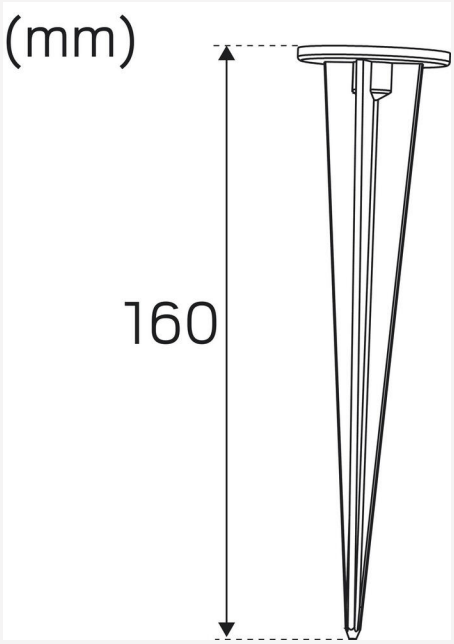

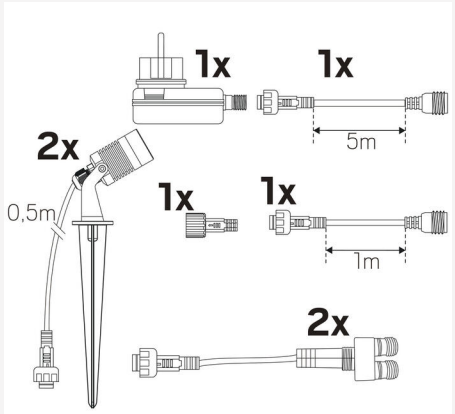

(mm)
160

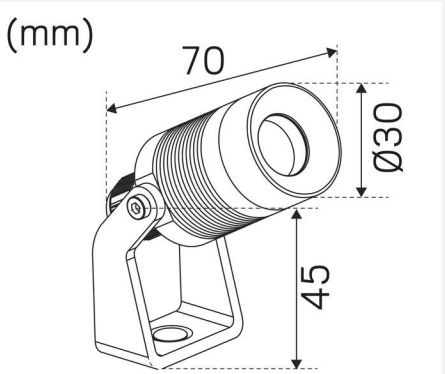
1x
1x
5m
2x
0,5m
1x
1x
1m
2x


(mm)
70
Ø30
45




B