hidealite | Elektro Elco AB Tallvägen 5, 564 35 Bankeryd, Sweden
Phone + 46(0)36 290 60 00 | info@elco.se | www.hidealite.com





# CONE G2 PILLAR SOCKET GU10 GALV

## Description

Cone G2 Pillar is a dimmable bollard light featuring a cone-shaped luminaire that provides an even and pleasant asymmetrical light pattern on the ground. Perfect for pathways, gardens, and wooden decks in both private and public environments.

## Light Technical Data

Reflector technology with built-in DIP switch (3000K/4000K) for easy color temperature adjustment. Available with LED or GU10. The cone shape provides a light pattern that reaches further out on the ground. Ra>80.

## Technical data

Built-in DIP switch for luminous flux adjustment. Replaceable LED and driver for easy servicing. Dimmable via phase dimming. LED lifetime: L80 100 000h Ta25°C. Driver lifetime: 100 000h /10%.

## Operation and Connection

 Pre-assembled with 2m cable for easy installation.

## Color and material

Available in black or galvanized steel. The galvanized version develops a natural patina over time. Available both with and without power outlet, socket.

## Measurement and installation

IP65, socket IP44. Adapted for foundations, but also works on wooden decks or concrete slabs. Possibility to wire light and socket separately.

## DESCRIPTION

| | |
|---|---|
| **GTIN:** | 7392971156057 |
| **Item Name:** | Cone G2 Pillar Socket GU10 Galv |
| **Warranty:** | 5 years |

## LIGHT TECHNICAL DATA

| | |
|---|---|
| **Replaceability:** | Replaceable LED by professional, Replaceable Control gear by professional |
| **Lamp Holder (type):** | GU10 |
| **Number of Lamps (pcs):** | 1 |

## TECHNICAL DATA

| | |
|---|---|
| **Voltage (type):** | AC |

## OPERATION AND CONNECTION

| | |
|---|---|
| **Driver Included:** | No |
| **Connection (type):** | Quick Terminal |
| **Connection (mm2):** | 5x0,75-2,5 |
| **Through Wiring:** | Yes |
| **Strain Relief:** | No |
| **THD (%):** | 20 |
| **Max. Power (W):** | 8 |

## COLOR AND MATERIAL

| | |
|---|---|
| **Material:** | Steel |
| **Color:** | Galvanized |
| **Available in special color:** | No |
| **Corrosion class:** | C4 |


## MEASUREMENT AND INSTALLATION

| | |
|---|---|
| **Operating Environment:** | Outdoor |
| **IP Degree of Protection:** | 44 |
| **Protection Class:** | I |
| **Installation:** | Ground |
| **Mounting Installation:** | Screw Mounting |
| **Approval Marks:** | CE, a Hide-a-lite Choice |
| **Impact Strength:** | IK08 |
| **Filament Test IEC 695-2-1(°C):** | 650 |
| **Length (mm):** | 251 |
| **Width (mm):** | 160 |
| **Height (mm):** | 795 |
| **Diameter (mm):** | 105 |
| **Weight (kg):** | 6,4 |





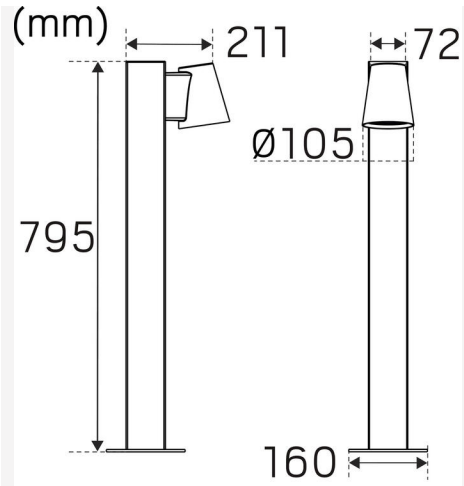


(mm)
211
72
Ø105
795
160