
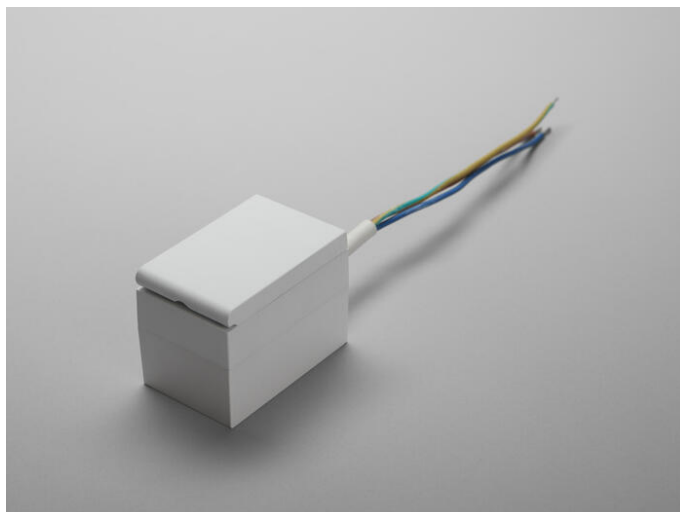


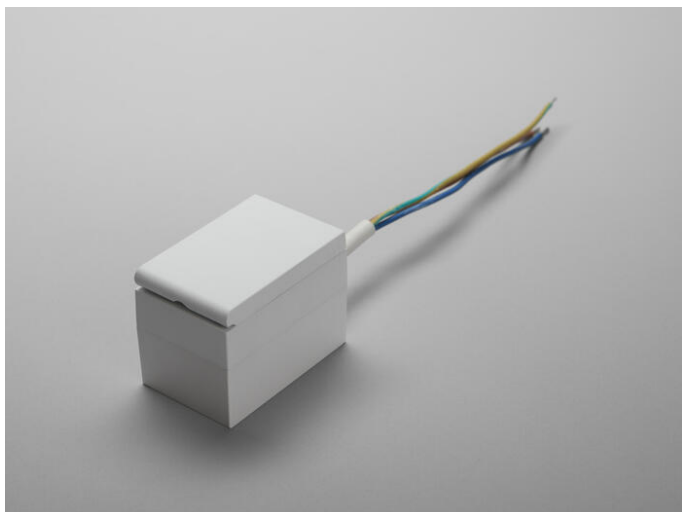

SOCKET LUMO IP44

Description

Practical socket for Lumo IP44 (ordered separately).

Operation and Connection

Easily connects with the integrated 4-pin terminal block, allowing control of a separate socket directly from the luminaire. Supplied complete with 25 cm connection cable.

DESCRIPTION

GTIN:	7392971157061
Item Name:	Socket Lumo IP44
Warranty:	5 years

OPERATION AND CONNECTION

Connection (type):	Open Cable End
Length Connection (cm):	25
Connection (mm2):	3x0,75
Strain Relief:	Yes
Min. Ta (°C):	-20
Max. Ta (°C):	40
Operating Temperature:	-20...+40°C

COLOR AND MATERIAL

Material:	Recycled, Plastic
Material Housing/Enclosure:	Recycled, Plastic
Color:	White
Available in special color:	No

MEASUREMENT AND INSTALLATION

Operating Environment:	Indoor / bathroom (ceiling area 1)
IP Degree of Protection:	44
Installation:	Wall
Mounting Installation:	Screw Mounting
Approval Marks:	CE
Filament Test IEC 695-2-1(°C):	650
Length (mm):	104
Width (mm):	55
Height (mm):	62
Weight (kg):	0,153
Min. Built-in (mm):	104x55x62

