



## LED DIMTRAFO MDR 24V 45W

Dimmer trafo for 24 LED light sources with all-in-one function (integrated dimmer and trafo). Easy and quick installation as there is only one unit that needs installation. Up to ten units can be coupled in parallel and controlled together from one or more spring-loaded pushbuttons (potential free) or via a 470 Kohm potentiometer and 1-10V.

### DESCRIPTION

<b>GTIN:</b>	7392971121970
<b>Item Name:</b>	LED dimtrafo MDR 24V 45W
<b>Warranty:</b>	5 years

### OPERATION AND CONNECTION

<b>Dimmable:</b>	Yes
<b>Type of Dimming:</b>	1-10V, Push 2-wire Potential Free, Potentiometer
<b>Driver Model:</b>	Constant Voltage
<b>Driver Type:</b>	Stand Alone
<b>Connection (type):</b>	Screw Terminals
<b>Strain Relief:</b>	Yes
<b>Power Interval for Catalogue (W):</b>	10-60
<b>Max. Power (W):</b>	60
<b>Min. Ta (°C):</b>	-10
<b>Max. Ta (°C):</b>	40
<b>Protection Against:</b>	Short Circuit, Overload, Overheating 110°C
<b>Fuse B10 (pcs):</b>	9
<b>Fuse B16 (pcs):</b>	10
<b>Fuse C10 (pcs):</b>	10
<b>Fuse C16 (pcs):</b>	25

### COLOR AND MATERIAL


<b>Material:</b>	Plastic
<b>Color:</b>	White
<b>Environmental Assessment:</b>	Byggarubedömningen

## MEASUREMENT AND INSTALLATION


<b>Operating Environment:</b>	Indoor / dry locations
<b>IP Degree of Protection:</b>	20
<b>Protection Class:</b>	II
<b>Fire Safety Marks:</b>	MM-mark
<b>Approval Marks:</b>	CE
<b>Length (mm):</b>	206
<b>Width (mm):</b>	51
<b>Height (mm):</b>	35
<b>Weight (kg):</b>	0,24
<b>Built-in Ø (mm):</b>	63mm



(mm)

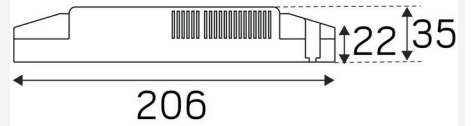

(mm)



(mm)

