hidealite | Elektro Elco AB Tallvägen 5, 564 35 Bankeryd, Sweden
Phone + 46(0)36 290 60 00 | info@elco.se | www.hidealite.com





MILO XXL II ANTHRACITE 4000K

Wall luminaire in a timeless design with both up- and downward light for lighting large properties and facades. Impact resistant (IK09) cylinder-shaped luminaire that creates security and provides good lighting during the dark hours of the day. Easily installed thanks to separate rear element and push-in, loop-in, loop-out terminal block for direct connection to 230V. IP65 model, anodised with durable powder coating for tough environments. Comes with integrated driver and spacers for surface-mounted cable routing.

DESCRIPTION

GTIN:	7392971138084
Item Name:	Milo XXL II Anthracite 4000K
Warranty:	5 years

LIGHT TECHNICAL DATA

Max. Luminaire Lumen (lm):	3700
Light Source:	LED
Replaceability:	Replaceable LED by professional, Replaceable Control gear by professional
LED Colour:	White
Colour Temperature (K):	4000
Colour Rendering Index (Ra):	>80
Colour Consistency (SDCM):	3
Luminous Intensity (cd):	2x3900
Beam Angle (°):	36
Light sharing:	Symmetric
Light Outlet:	Direct
Number of Lamps (pcs):	2
Number of LED (pcs):	2
Life Time:	L70 100 000h Ta 25°C
Nominel Life Time (h):	100000
Lumen maintenance 50 000h:	L88
Lumen maintenance 100 000h:	L70
LLMF @ 50 000h:	0.88
LLMF @ 100 000h:	0.7
Life Time Driver:	50 000h/10%

TECHNICAL DATA

Voltage (type):	AC
Voltage Interval (V):	220...240V
Voltage Nominal (V):	230
Line Frequency (Hz):	50, 60
Power LED (W):	30,6
Max. Power Luminaire (W):	34
Max. System Power (W):	34
Max. Efficiency Luminaire (lm/W):	108,8
Max. Efficiency System (lm/W):	108,8
Containing light source energy efficiency class (EU) 2019/2015:	D
Eprel registration number:	988919

OPERATION AND CONNECTION

Dimmable:	No
Type of Dimming:	OnOff
Driver Included:	Yes
Driver Model:	Constant Current
Driver Type:	Built-in
Connection (type):	Quick Terminal
Connection (mm2):	3x0,75-2,5
Through Wiring:	Yes
Strain Relief:	Yes
Power Factor ʎ:	0,9
Efficiency (%):	91
Constant Current (mA):	900
Operating Temperature:	-20...+40°C
Max. Tc (°C):	95
Fuse B10 (pcs):	6
Fuse B16 (pcs):	9
Fuse C10 (pcs):	20
Fuse C16 (pcs):	32

COLOR AND MATERIAL


Material:	Aluminium
Color:	Antracit
Environmental Assessment:	Byggvarubedömningen

MEASUREMENT AND INSTALLATION

Operating Environment:	Indoor / wet locations, Outdoor
IP Degree of Protection:	65
Protection Class:	I
Installation:	Surface mounted
Mounting Installation:	Screw Mounting
Approval Marks:	CE
Impact Strength:	IK09
Filament Test IEC 695-2-1(°C):	650
Width (mm):	140
Height (mm):	296
Depth (mm):	180
Diameter (mm):	140
Weight (kg):	2,35



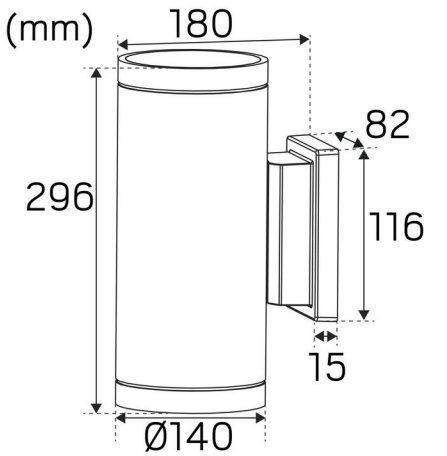


(mm)
180
82
296
116
15
Ø140