



## LEDSTRIP RXM IP20 24V 3000K LPM

Flexible LEDstrip only 3.5 mm wide, high lumen output and very good colour rendering, Ra>90. Made for most indoor applications where an even lumen output is desired. Can be fitted in our aluminium profiles Micro U or Micro T. Comes as standard in rolls of five metres with 2m 2 m connecting cable at each end and self-adhesive tape for easy installation. Also available made to measure in optional lengths. Upon request, running meters with connection cables are delivered according to your specifications; running meters are delivered as standard without connection cables. Drivers are ordered separately according to required dimmer technology and placing.

### DESCRIPTION

<b>GTIN:</b>	7392971129815
<b>Item Name:</b>	LEDstrip RXM IP20 24V 3000K lpm
<b>Warranty:</b>	5 years

### LIGHT TECHNICAL DATA

<b>Max. Luminaire Lumen (lm):</b>	510
<b>Light Source:</b>	LED
<b>Light Source Included:</b>	Yes
<b>Replaceability:</b>	Non-replaceable LED
<b>LED Colour:</b>	Warm White
<b>Colour Temperature (K):</b>	3000
<b>Colour Rendering Index (Ra):</b>	>90
<b>Colour Consistency (SDCM):</b>	5
<b>Luminous Intensity (cd):</b>	160
<b>Beam Angle (°):</b>	120
<b>Light sharing:</b>	Symmetric
<b>Light Outlet:</b>	Direct
<b>Number of Lamps (pcs):</b>	1
<b>Number of LED (pcs):</b>	120
<b>LED Pitch (mm):</b>	8
<b>Life Time:</b>	h Ta °C
<b>Nominal Life Time (h):</b>	50000

## TECHNICAL DATA

Voltage (type):	DC
Voltage Interval (V):	24...24V
Voltage Nominal (V):	24
Line Frequency (Hz):	50, 60
Power LED (W):	7,2
Max. Power Luminaire (W):	7,2
Max. System Power (W):	7,92
Max. Efficiency Luminaire (lm/W):	73
Max. Efficiency System (lm/W):	73
Energy Efficiency Class (EU) 2019/2015:	G

## OPERATION AND CONNECTION

Dimmable:	Yes
Driver Included:	No
Driver Model:	Constant Voltage
Min. Ta (°C):	-20
Max. Ta (°C):	45
Max. Tc (°C):	85

## COLOR AND MATERIAL

Material:	Copper
Color:	White
Environmental Assessment:	Byggvarubedömningen


## MEASUREMENT AND INSTALLATION

Operating Environment:	Indoor / dry locations
IP Degree of Protection:	20
Protection Class:	III
Installation:	Surface mounted
Mounting Installation:	Self Adhesive Tape
Approval Marks:	CE
Length (mm):	1000
Width (mm):	4
Height (mm):	2
Weight (kg):	0,02


## LEDSTRIPS

Min. Bend Radius (mm):	60
Min. Length (m):	0,05
Max. Length (m):	5
Cutting Increments (mm):	50



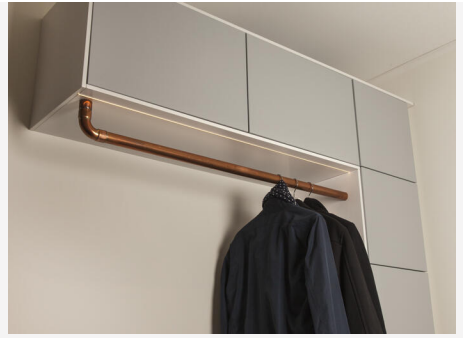

(mm)

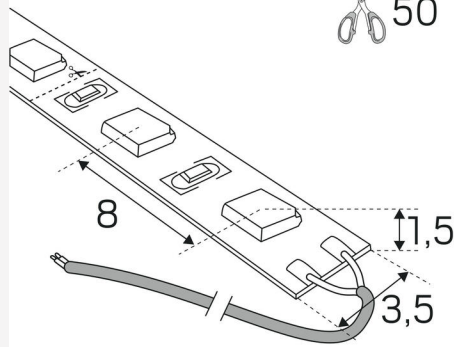

**Hide-a-lite**

7502860



**7**  
kWh/1000h



2019/2015

