



LEDSTRIP RX TUNE IP20 24V 5M

LEDstrip with Tune function for a strengthened feeling of warm light with a very good colour rendering, Ra>90. Gives a warmer LED colour when dimmed; from work lighting during the day to cosy lighting in the evening. LEDstrip RX Tune is perfect for indoor use in both home and public environments. We recommend using an aluminium profile with opal cover if the fitting is visible. Comes with self-adhesive tape and quick connections. Upon request, running meters with connection cables are delivered according to your specifications; running meters are delivered as standard without connection cables. Drivers are ordered separately according to required dimmer technology and location.

DESCRIPTION

GTIN:	7392971136370
Item Name:	LEDstrip RX Tune IP20 24V 5m
Warranty:	5 years

LIGHT TECHNICAL DATA

Max. Luminaire Lumen (lm):	5650
Light Source:	LED
Light Source Included:	Yes
Replaceability:	Non-replaceable LED
LED Colour:	Tune
Colour Temperature (K):	2700
Range Colour Temperature (K):	Tune 2000-2700
Colour Rendering Index (Ra):	>90
Colour Consistency (SDCM):	4
Luminous Intensity (cd):	360
Beam Angle (°):	120
Light sharing:	Symmetric
Light Outlet:	Direct
Number of Lamps (pcs):	1
Number of LED (pcs):	600
LED Pitch (mm):	16
Life Time:	h Ta °C
Nominal Life Time (h):	50000

TECHNICAL DATA

Voltage (type):	DC
Voltage Interval (V):	24...24V
Voltage Nominal (V):	24
Voltage Forward (Vf):	3
Power LED (W):	60
Max. Power Luminaire (W):	72
Max. System Power (W):	79,2
Max. Efficiency Luminaire (lm/W):	78
Max. Efficiency System (lm/W):	72
Energy Efficiency Class (EU) 2019/2015:	G

OPERATION AND CONNECTION

Dimmable:	Yes
Driver Included:	No
Driver Model:	Constant Voltage
Connection (type):	Cable, Open Cable End
Length Connection (cm):	200
Connection (mm ²):	2x0,5
Min. Ta (°C):	-20
Max. Ta (°C):	45
Max. Tc (°C):	70

COLOR AND MATERIAL


Material:	Copper
Color:	White
Environmental Assessment:	Byggvarubedömningen

MEASUREMENT AND INSTALLATION

Operating Environment:	Indoor / dry locations
IP Degree of Protection:	20
Protection Class:	III
Installation:	Surface mounted
Mounting Installation:	Self Adhesive Tape
Approval Marks:	CE
Length (mm):	5000
Width (mm):	8
Height (mm):	2
Weight (kg):	0,15


LEDSTRIPS

Min. Bend Radius (mm):	60
Min. Length (m):	0,1
Max. Length (m):	5
Cutting Increments (mm):	100

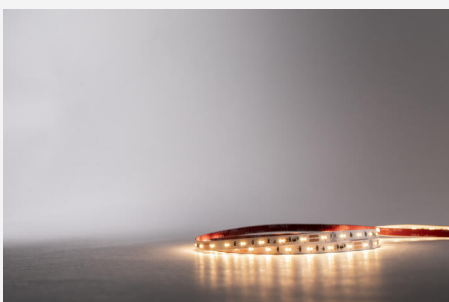



(mm)

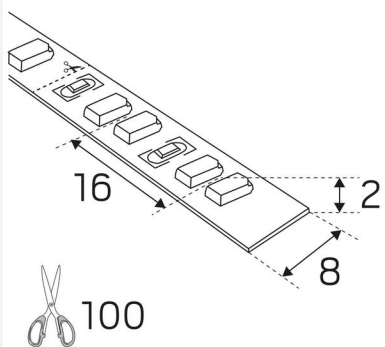

Hide-a-lite

7505097

A

B

C

D

E

F

G

G

72
kWh/1000h



2019/2015

