

A
G E

LEDSTRIP RX HDI IP20 24V 4000K 5M

LEDstrip with short spacing between LEDs giving high lumen output with very good light quality and colour rendering, Ra>90. Perfect for a homogenous light with opal cover- also with lower profiles. Comes as standard in rolls of five metres with 2 m connecting cable at each end, 1pc quick connection and self-adhesive tape for easy installation. Also available made to measure in optional lengths with 5cm cut-off intervals. Upon request, running meters with connection cables are delivered according to your specifications; running meters are delivered as standard without connection cables. Drivers are ordered separately according to required dimmer technology and placing.

DESCRIPTION

GTIN:	7392971137568
Item Name:	LEDstrip RX HDI IP20 24V 4000K 5m
Warranty:	5 years

LIGHT TECHNICAL DATA

Max. Luminaire Lumen (lm):	13000
Light Source:	LED
Light Source Included:	Yes
Replaceability:	Non-replaceable LED
LED Colour:	White
Colour Temperature (K):	4000
Colour Rendering Index (Ra):	>90
Colour Consistency (SDCM):	3
Luminous Intensity (cd):	3250
Beam Angle (°):	120
Light sharing:	Symmetric
Light Outlet:	Direct
Number of Lamps (pcs):	1
Number of LED (pcs):	700
LED Pitch (mm):	7
Life Time:	h Ta °C
Nominal Life Time (h):	50000

TECHNICAL DATA

Voltage (type):	DC
Voltage Interval (V):	24...24V
Voltage Nominal (V):	24
Voltage Forward (Vf):	3
Max. Power Luminaire (W):	96
Max. System Power (W):	105,6
Max. Efficiency Luminaire (lm/W):	135
Max. Efficiency System (lm/W):	124
Energy Efficiency Class (EU) 2019/2015:	E

OPERATION AND CONNECTION

Dimmable:	Yes
Driver Included:	No
Driver Model:	Constant Voltage
Connection (type):	Cable
Length Connection (cm):	200
Connection (mm ²):	2x0,5
Min. Ta (°C):	-20
Max. Ta (°C):	45
Max. Tc (°C):	75

COLOR AND MATERIAL


Material:	Copper
Color:	White
Environmental Assessment:	Byggvarubedömningen

MEASUREMENT AND INSTALLATION


Operating Environment:	Indoor / dry locations
IP Degree of Protection:	20
Protection Class:	III
Installation:	Surface mounted
Mounting Installation:	Self Adhesive Tape
Approval Marks:	CE
Requires cooling:	Yes
Length (mm):	5000
Width (mm):	8
Height (mm):	2
Weight (kg):	0,08

LEDSTRIPS

Min. Bend Radius (mm):	60
Min. Length (m):	0,05
Max. Length (m):	5
Cutting Increments (mm):	50

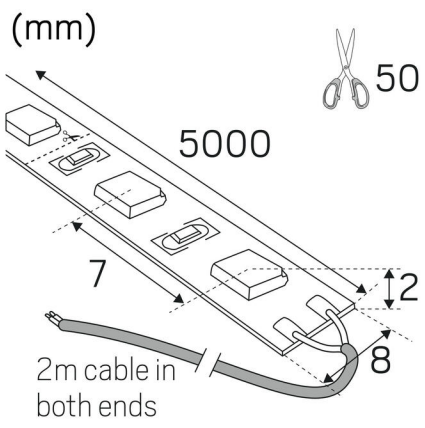

included




Hide-a-lite
7505724

A
B
C
D
E
F
G

E

96
kWh/1000h



2019/2015

