



LEDSTRIP 24V LONG IP20 MIDLUM 2700K LPM

Dimmable LED strip that pulls away in length and creates an even light without interruption in lengths of up to 20m, 40m when feeding from the middle or from two sides, cutting increments of 5cm. Very good colour rendering, Ra > 90. Fits perfectly in our range of aluminium profiles. Opal cover is recommended for visible installation. Ordered in desired length with self-adhesive tape. Upon request, running meters with connection cables are delivered according to your specifications; running meters are delivered as standard without connection cables. Quick joint and quick connection are available as accessories, ordered separately. Driver ordered after desired dimming technology and location.

DESCRIPTION

GTIN:	7392971137780
Item Name:	LEDstrip 24V Long IP20 MidLum 2700K lpm
Warranty:	5 years

LIGHT TECHNICAL DATA

Max. Luminaire Lumen (lm):	680
Light Source:	LED
Light Source Included:	Yes
Replaceability:	Non-replaceable LED
LED Colour:	Warm White
Colour Temperature (K):	2700
Colour Rendering Index (Ra):	>90
Colour Consistency (SDCM):	3
Luminous Intensity (cd):	220
Beam Angle (°):	120
Light sharing:	Symmetric
Light Outlet:	Direct
Number of Lamps (pcs):	1
Number of LED (pcs):	120
LED Pitch (mm):	8
Life Time:	L70 50000h Ta 25°C
Nominal Life Time (h):	50000

TECHNICAL DATA

Voltage (type):	DC
Voltage Interval (V):	24...24V
Voltage Nominal (V):	24
Voltage Forward (Vf):	2,9
Max. Power Luminaire (W):	8
Max. Efficiency Luminaire (lm/W):	85
Energy Efficiency Class (EU) 2019/2015:	F
Eprel registration number:	930889

OPERATION AND CONNECTION

Dimmable:	Yes
Driver Included:	No
Driver Model:	Constant Voltage
Min. Ta (°C):	-25
Max. Ta (°C):	45
Max. Tc (°C):	50

COLOR AND MATERIAL


Material:	Copper
Color:	White
Environmental Assessment:	Byggvarubedömningen

MEASUREMENT AND INSTALLATION

Operating Environment:	Indoor / dry locations
IP Degree of Protection:	20
Protection Class:	III
Installation:	Surface mounted
Mounting Installation:	Self Adhesive Tape
Approval Marks:	CE
Filament Test IEC 695-2-1(°C):	650
Length (mm):	1000
Width (mm):	10
Height (mm):	2
Weight (kg):	0,05

LEDSTRIPS

Min. Bend Radius (mm):	50
Min. Length (m):	0,05
Max. Length (m):	20
Cutting Increments (mm):	50

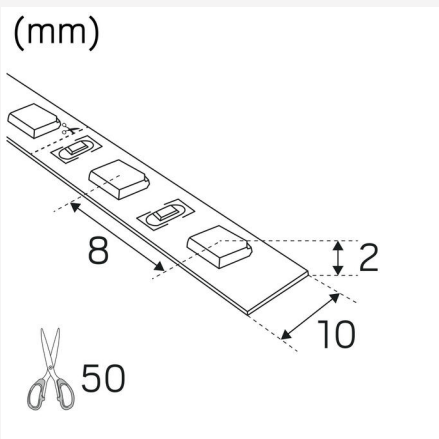



Hide-a-lite

7505746



8
kWh/1000h

