



LEDSTRIP RX HD IP67 24V 4000K LPM

Professional LEDstrip with close LED spacing to create a homogenous light with opal cover - also for low profiles. High lumen output and very good colour rendering, Ra>90 Comes with 2 m of connecting cable at each end, 2pcs shrink hoses, 10pcs clips, 20pcs screws and self-adhesive tape for easy installation. Also available made to measure in optional lengths. Upon request, running meters with connection cables are delivered according to your specifications; running meters are delivered as standard without connection cables. Drivers are ordered separately according to required dimmer technology and placing.

DESCRIPTION

GTIN:	7392971138688
Item Name:	LEDstrip RX HD IP67 24V 4000K lpm
Warranty:	5 years

LIGHT TECHNICAL DATA

Max. Luminaire Lumen (lm):	1200
Light Source:	LED
Light Source Included:	Yes
Replaceability:	Non-replaceable LED
LED Colour:	White
Colour Temperature (K):	4000
Colour Rendering Index (Ra):	>90
Colour Consistency (SDCM):	3
Luminous Intensity (cd):	370
Beam Angle (°):	120
Light sharing:	Symmetric
Light Outlet:	Direct
Number of Lamps (pcs):	1
Number of LED (pcs):	168
LED Pitch (mm):	6
Life Time:	L70 50000h Ta 25°C
Nominal Life Time (h):	50000
Lumen maintenance 50 000h:	L79
LLMF @ 50 000h:	0.79

TECHNICAL DATA

Voltage (type):	DC
Voltage Interval (V):	24...24V
Voltage Nominal (V):	24
Max. Power Luminaire (W):	12,5
Max. System Power (W):	13,75
Max. Efficiency Luminaire (lm/W):	96
Max. Efficiency System (lm/W):	87,3
Energy Efficiency Class (EU) 2019/2015:	F
Eprel registration number:	917474

OPERATION AND CONNECTION

Dimmable:	Yes
Driver Included:	No
Driver Model:	Constant Voltage
Min. Ta (°C):	-20
Max. Ta (°C):	45
Max. Tc (°C):	70

COLOR AND MATERIAL


Material:	Copper, PVC
Color:	White
Environmental Assessment:	Byggvarubedömningen

MEASUREMENT AND INSTALLATION

Operating Environment:	Indoor / wet locations, Outdoor
IP Degree of Protection:	67
Protection Class:	III
Installation:	Surface mounted
Mounting Installation:	Self Adhesive Tape, Clips
Approval Marks:	CE
Length (mm):	1000
Width (mm):	10
Height (mm):	6
Weight (kg):	0,083

LEDSTRIPS

Min. Bend Radius (mm):	60
Min. Length (m):	0,036
Max. Length (m):	10
Cutting Increments (mm):	35,7

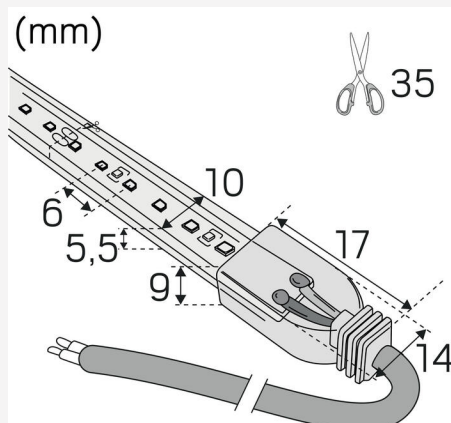



Hide-a-lite

7506461



13
kWh/1000h

