



## SHADE OAK 3000K

Modern LED luminaire with retro-look and pleasant indirect up and downlight, giving a decorative light pattern on the wall. Perfect as decorative lighting in both private and public areas. Versions available in wood veneer or white enamel aluminium. Comes complete with integrated dimmable driver. Dimmable with the most commonly available dimmers on the market.

### DESCRIPTION

<b>GTIN:</b>	7392971129433
<b>Item Name:</b>	Shade Oak 3000K
<b>Warranty:</b>	5 years

### LIGHT TECHNICAL DATA

<b>Max. Luminaire Lumen (lm):</b>	470
<b>Light Source:</b>	LED
<b>Light Source Included:</b>	Yes
<b>Replaceability:</b>	Replaceable LED by professional, Replaceable Control gear by professional
<b>LED Colour:</b>	Warm White
<b>Colour Temperature (K):</b>	3000
<b>Colour Rendering Index (Ra):</b>	>90
<b>Colour Consistency (SDCM):</b>	3
<b>Beam Angle (°):</b>	150
<b>Light sharing:</b>	Symmetric
<b>Light Outlet:</b>	Indirect
<b>Number of Lamps (pcs):</b>	1
<b>Number of LED (pcs):</b>	1
<b>Life Time:</b>	h Ta °C
<b>Nominal Life Time (h):</b>	50000
<b>Flicker (PstLM):</b>	0,04
<b>Stroboscopic effect (SVM):</b>	0,03

## TECHNICAL DATA

Voltage (type):	AC
Voltage Interval (V):	220...240V
Voltage Nominal (V):	230
Line Frequency (Hz):	50
Max. Power Luminaire (W):	9
Max. System Power (W):	9
Max. Efficiency Luminaire (lm/W):	52
Max. Efficiency System (lm/W):	52
Containing light source energy efficiency class (EU) 2019/2015: E	

## OPERATION AND CONNECTION


Dimmable:	Yes
Type of Dimming:	Trailing Edge
Driver Included:	Yes
Driver Model:	Constant Current
Connection (type):	Screw Terminals
Constant Current (mA):	500
Min. Ta (°C):	-20
Max. Ta (°C):	45
Max. Tc (°C):	80
Fuse B10 (pcs):	140
Fuse B16 (pcs):	224
Fuse C10 (pcs):	280
Fuse C16 (pcs):	448

## COLOR AND MATERIAL

Material:	Aluminium
Color:	Oak

## MEASUREMENT AND INSTALLATION

Operating Environment:	Indoor / dry locations
IP Degree of Protection:	20
Protection Class:	I
Installation:	Surface mounted
Mounting Installation:	Screw Mounting
Approval Marks:	CE
Width (mm):	220
Height (mm):	95
Depth (mm):	68
Weight (kg):	0,57

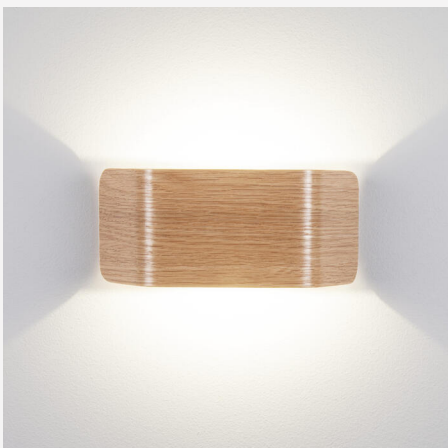

(mm)

