



SLIM LED B ALU 3000K

LED luminaire with installation depth of only 9 mm, perfect as illumination in cabinets and under shelves in kitchens and bathrooms. Energy-efficient LED light source of 2W with 55° light distribution. Replaces a corresponding 10W halogen spot with an energy saving of 80%. Housing of tough aluminium. Comes with 2 m cable with quick contact, connects to LED trafo 12V DC via parallel coupling, can be regulated with LED dimmer. Spacer ring for surface mounting available as an accessory.

DESCRIPTION

GTIN:	7392971119939
Item Name:	Slim LED B Alu 3000K
Warranty:	5 years

LIGHT TECHNICAL DATA

Max. Luminaire Lumen (lm):	125
Light Source:	LED
Light Source Included:	Yes
Replaceability:	Non-replaceable LED
LED Colour:	Warm White
Colour Temperature (K):	3000
Colour Rendering Index (Ra):	>70
Colour Consistency (SDCM):	5
Luminous Intensity (cd):	100
Beam Angle (°):	55
Life Time:	L70 25000h Ta 25°C
Nominal Life Time (h):	25000

TECHNICAL DATA

Voltage Nominal (V):	12
Max. Power Luminaire (W):	2
Max. Efficiency Luminaire (lm/W):	62,5
Containing light source energy efficiency class (EU) 2019/2015:	F
Eprel registration number:	1370834

OPERATION AND CONNECTION


Dimmable:	Yes
Driver Included:	No
Driver Model:	Constant Voltage
Connection (type):	Mini Contact
Min. Ta (°C):	-25
Max. Ta (°C):	40

COLOR AND MATERIAL

Material:	Aluminium
Color:	Aluminum


MEASUREMENT AND INSTALLATION

Operating Environment:	Indoor / bathroom (ceiling area 1)
IP Degree of Protection:	44
Protection Class:	III
Installation:	Built-in, Surface mounted
Mounting Installation:	Tension Spring
Ceiling Thickness Interval (mm):	3mm
Fire Safety Marks:	MM-mark, Not in insulation without protection cover
Approval Marks:	CE
Height (mm):	11
Diameter (mm):	68
Weight (kg):	0,045
Min. Built-in (mm):	Ø57x9
Height Recessed Part (mm):	9
Height Exterior Part (mm):	2
Built-in Ø (mm):	57mm

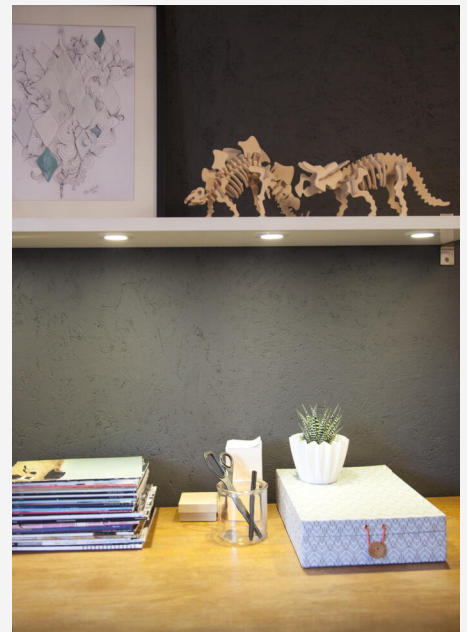



(mm)

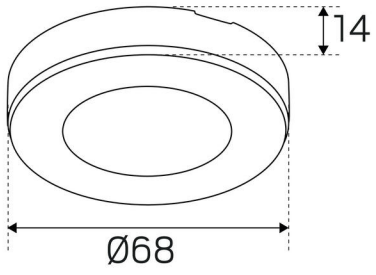

(mm)

