hidealite | Elektro Elco AB Tallvägen 5, 564 35 Bankeryd, Sweden
Phone + 46(0)36 290 60 00 | info@elco.se | www.hidealite.com





COMFORT QUICK OUTDOOR ANTHRACITE 3000K

Low built and adjustable outdoor luminaire in the Comfort series with an installation height of just 40 mm. All components are IP44 and approved for installation in open ceiling structures or directly against insulation. Hole dimensions between 73 and 85 - perfect for housing improvements. Complete with mains dimmable driver, connection box with push-in, loop-in, loop-out terminals and screwless strain relief for cable or flexi-hose 16 mm. Dimmable with the most commonly available dimmers on the market.

DESCRIPTION

GTIN:	7392971130033
Item Name:	Comfort Quick Outdoor Anthracite 3000K
Warranty:	5 years

LIGHT TECHNICAL DATA

Max. Luminaire Lumen (lm):	435
Light Source:	LED
Replaceability:	Non-replaceaable LED, Replaceable Control gear by professional
LED Colour:	Warm White
Colour Temperature (K):	3000
Colour Rendering Index (Ra):	>80
Colour Consistency (SDCM):	3
Luminous Intensity (cd):	920
Beam Angle (°):	36
Light sharing:	Symmetric
Light Outlet:	Direct
Number of Lamps (pcs):	1
Number of LED (pcs):	1
Life Time:	L70 50 000h Ta 25°C
Nominel Life Time (h):	50000
Flicker (PstLM):	0,015
Stroboscopic effect (SVM):	0,021

TECHNICAL DATA

Adjustable:	Yes
Tiltable (°):	15
Voltage (type):	AC
Voltage Interval (V):	220...240V
Voltage Nominal (V):	230
Line Frequency (Hz):	50
Power LED (W):	5
Max. Power Luminaire (W):	6
Max. System Power (W):	6
Max. Efficiency Luminaire (lm/W):	72,5
Max. Efficiency System (lm/W):	72,5
Containing light source energy efficiency class (EU) 2019/2015:	F
Eprel registration number:	1117197

OPERATION AND CONNECTION

Dimmable:	Yes
Type of Dimming:	Trailing Edge, Leading Edge
Driver Included:	Yes
Driver Model:	Constant Current
Driver Type:	Stand Alone
Connection (type):	Quick Terminal
Connection (mm2):	3x0,75-2,5
Through Wiring:	Yes
Strain Relief:	Yes
Constant Current (mA):	110
Operating Temperature:	-20...+45°C
Max. Tc (°C):	85
Dimming secondary side:	AM
Memory Function Power Failure:	No
Fuse B10 (pcs):	68
Fuse B16 (pcs):	110
Fuse C10 (pcs):	114
Fuse C16 (pcs):	184

COLOR AND MATERIAL

Material:	Aluminium
Color:	Antracit


MEASUREMENT AND INSTALLATION


Operating Environment:	Indoor / wet locations, Outdoor
IP Degree of Protection:	44
Protection Class:	II
Installation:	Built-in
Mounting Installation:	Mounting Spring
Ceiling Thickness Interval (mm):	3-26mm
Fire Safety Marks:	Approved for installation against insulation
Approval Marks:	CE
Height (mm):	40
Diameter (mm):	95
Weight (kg):	0,29
Min. Built-in (mm):	170x75x40
Height Recessed Part (mm):	32
Height Exterior Part (mm):	8
Built-in Ø (mm):	73-85mm








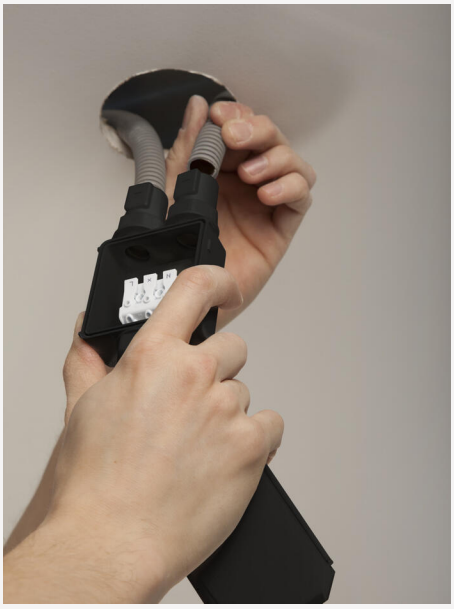


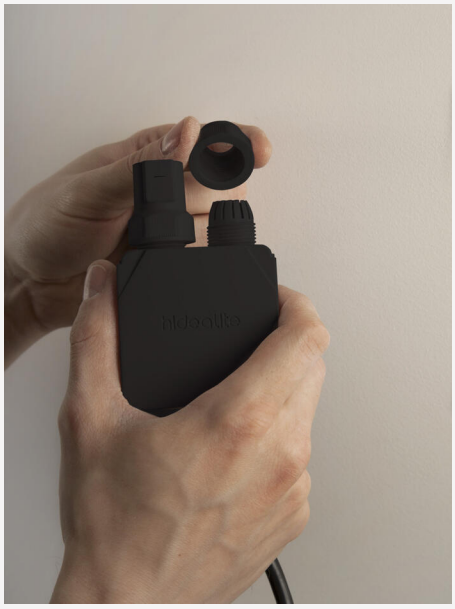

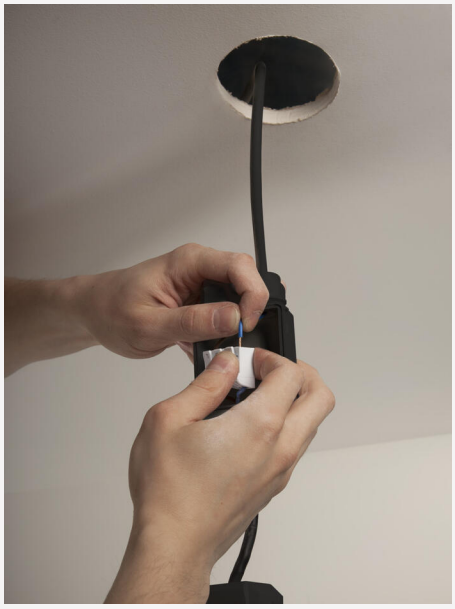




(mm)

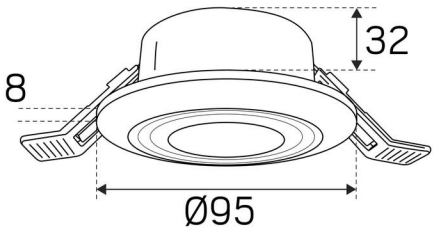

(mm)

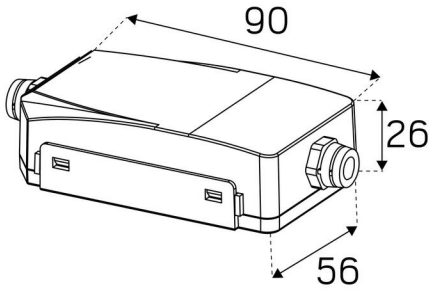

(mm)

