
hidealite | Elektro Elco AB Tallvägen 5, 564 35 Bankeryd, Sweden
Phone + 46(0)36 290 60 00 | info@elco.se | www.hidealite.com



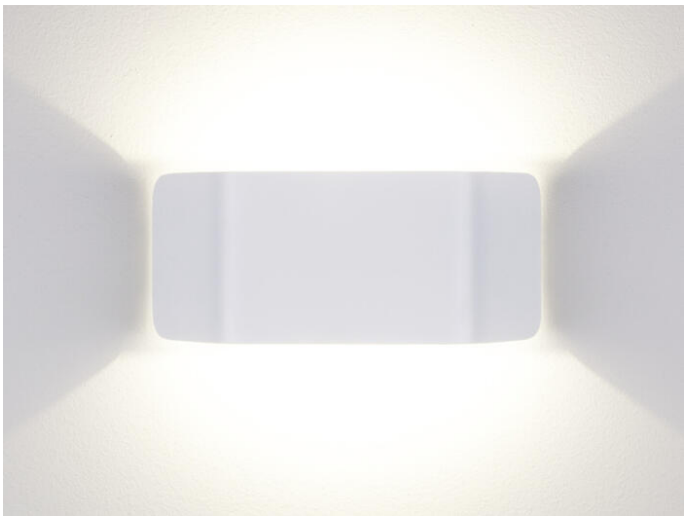

# SHADE WHITE 3000K

Modern LED luminaire with retro-look and pleasant indirect up and downlight, giving a decorative light pattern on the wall. Perfect as decorative lighting in both private and public areas. Versions available in wood veneer or white enamel aluminium. Comes complete with integrated dimmable driver. Dimmable with the most commonly available dimmers on the market.

## DESCRIPTION

| | |
|---|---|
| **GTIN:** | 7392971129426 |
| **Item Name:** | Shade White 3000K |
| **Warranty:** | 5 years |

## LIGHT TECHNICAL DATA

| | |
|---|---|
| **Max. Luminaire Lumen (lm):** | 530 |
| **Light Source:** | LED |
| **Replaceability:** | Replaceable LED by professional, Replaceable Control gear by professional |
| **LED Colour:** | Warm White |
| **Colour Temperature (K):** | 3000 |
| **Colour Rendering Index (Ra):** | >90 |
| **Colour Consistency (SDCM):** | 3 |
| **Beam Angle (°):** | 150 |
| **Light sharing:** | Symmetric |
| **Light Outlet:** | Indirect |
| **Number of Lamps (pcs):** | 1 |
| **Number of LED (pcs):** | 1 |
| **Life Time:** | L70 50 000h Ta 25°C |
| **Nominel Life Time (h):** | 50000 |
| **Flicker (PstLM):** | 0,04 |
| **Stroboscopic effect (SVM):** | 0,03 |

## TECHNICAL DATA

| | |
|---|---|
| **Voltage (type):** | AC |
| **Voltage Interval (V):** | 220...240V |
| **Voltage Nominal (V):** | 230 |
| **Line Frequency (Hz):** | 50 |
| **Max. Power Luminaire (W):** | 9 |
| **Max. System Power (W):** | 9 |
| **Max. Efficiency Luminaire (lm/W):** | 58,9 |
| **Max. Efficiency System (lm/W):** | 58,9 |

**Containing light source energy efficiency class (EU) 2019/2015:** E

## OPERATION AND CONNECTION


| | |
|---|---|
| **Dimmable:** | Yes |
| **Type of Dimming:** | Trailing Edge |
| **Driver Included:** | Yes |
| **Driver Model:** | Constant Current |
| **Connection (type):** | Screw Terminals |
| **Constant Current (mA):** | 500 |
| **Operating Temperature:** | -20...+45°C |
| **Max. Tc (°C):** | 80 |
| **Fuse B10 (pcs):** | 140 |
| **Fuse B16 (pcs):** | 224 |
| **Fuse C10 (pcs):** | 280 |
| **Fuse C16 (pcs):** | 448 |

## COLOR AND MATERIAL


| | |
|---|---|
| **Material:** | Aluminium |
| **Color:** | White |
| **Environmental Assessment:** | Byggvarubedömningen |

## MEASUREMENT AND INSTALLATION

| | |
|---|---|
| **Operating Environment:** | Indoor / dry locations |
| **IP Degree of Protection:** | 20 |
| **Protection Class:** | I |
| **Installation:** | Surface mounted |
| **Mounting Installation:** | Screw Mounting |
| **Approval Marks:** | CE |
| **Width (mm):** | 220 |
| **Height (mm):** | 95 |
| **Depth (mm):** | 68 |
| **Weight (kg):** | 0,7 |

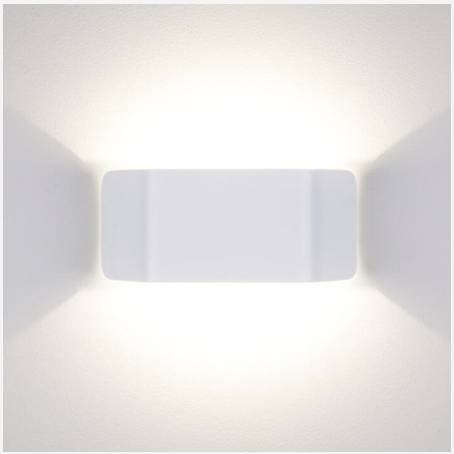

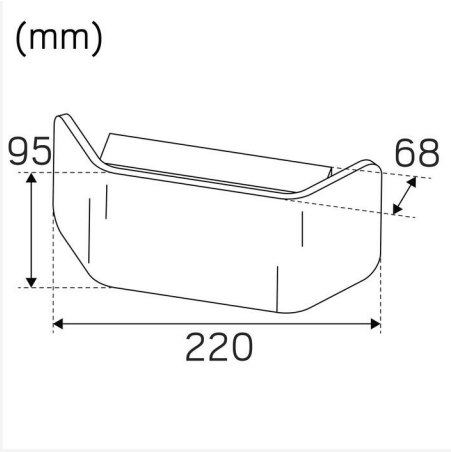


(mm)
95
68
220



