hidealite | Elektro Elco AB Tallvägen 5, 564 35 Bankeryd, Sweden
Phone + 46(0)36 290 60 00 | info@elco.se | www.hidealite.com





INDICATE MULTI GREY

Decorative lighting with multichip technology for wall recesses with stylish design. Installed to highlight or illuminate alleys, walls or stairways. Integrated driver for direct 230V connection. Classified IP65, suitable both inside and out with 3000K for halogen character. Note! The build dimensions depend on method of installation. Please follow the user instructions. Comes with plastic mounting box.

DESCRIPTION

GTIN:	7392971124797
Item Name:	Indicate Multi Grey
Warranty:	5 years

LIGHT TECHNICAL DATA

Max. Luminaire Lumen (lm):	25
Light Source:	LED
Replaceability:	Non-replaceaable LED, Replaceable Control gear by professional
LED Colour:	Warm White
Colour Temperature (K):	3000
Colour Rendering Index (Ra):	>80
Colour Consistency (SDCM):	3
Luminous Intensity (cd):	25
Life Time:	L70 50 000h Ta 25°C
Nominel Life Time (h):	50000
Flicker (PstLM):	0,025
Stroboscopic effect (SVM):	0,022

TECHNICAL DATA

Voltage (type):	AC
Voltage Interval (V):	220...240V
Voltage Nominal (V):	230
Line Frequency (Hz):	50
Power LED (W):	2
Max. Power Luminaire (W):	2
Max. System Power (W):	2
Max. Efficiency Luminaire (lm/W):	12,5
Max. Efficiency System (lm/W):	12,5

Containing light source energy efficiency class (EU) 2019/2015: F

OPERATION AND CONNECTION

Dimmable:	No
Type of Dimming:	OnOff
Driver Included:	Yes
Driver Model:	Constant Current
Driver Type:	Built-in
Connection (type):	Quick Terminal
Connection (mm2):	3x0,5-2,5
Through Wiring:	Yes
Strain Relief:	Yes
Operating Temperature:	-25...+40°C

COLOR AND MATERIAL

Material:	Aluminium
Color:	Grey

MEASUREMENT AND INSTALLATION

Operating Environment:	Indoor / wet locations, Outdoor
IP Degree of Protection:	65
Protection Class:	I
Installation:	Built-in
Mounting Installation:	Screw Mounting
Fire Safety Marks:	Not in insulation without protection cover
Approval Marks:	CE
Width (mm):	100
Height (mm):	100
Depth (mm):	72
Weight (kg):	0,42
Min. Built-in (mm):	95x95x70
Height Recessed Part (mm):	63
Height Exterior Part (mm):	9
Built-in LxB (mm):	77x77











(mm)

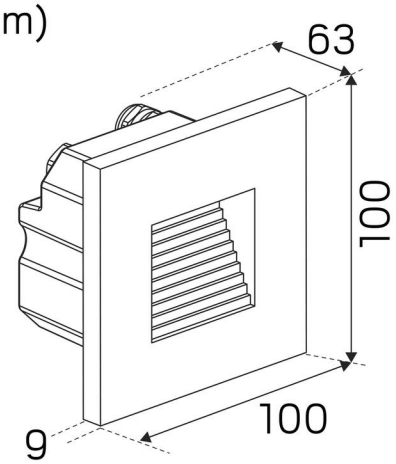

(mm)

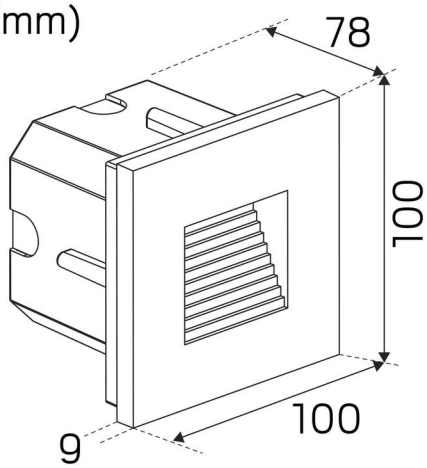

(mm)

