hidealite | Elektro Elco AB Tallvägen 5, 564 35 Bankeryd, Sweden
Phone + 46(0)36 290 60 00 | info@elco.se | www.hidealite.com





# DECKLIGHT GARDEN KIT

Kit with decorative luminaire with low energy consumption for striking lighting on a wooden deck. You can also increase security around your home by creating pleasant effects with outdoor lighting. Comes with 2x 0.5 m rubber cables with screw connections. The kit comprises 4x IP67 luminaires, 3x 1 m extension cables with quick connectors and 1x IP44 plug-in transformer with 5 m cable. Can be combined with Spotlight Garden thanks to the common coupling system.

## DESCRIPTION

| | |
|---|---|
| **GTIN:** | 7392971130163 |
| **Item Name:** | Decklight Garden Kit |
| **Warranty:** | 5 years |

## LIGHT TECHNICAL DATA

| | |
|---|---|
| **Max. Luminaire Lumen (lm):** | 5 |
| **Light Source:** | LED |
| **Replaceability:** | Non-replaceaable LED, Replaceable Control gear by end-user |
| **LED Colour:** | Warm White |
| **Colour Temperature (K):** | 3000 |
| **Colour Rendering Index (Ra):** | >80 |
| **Colour Consistency (SDCM):** | 3 |
| **Luminous Intensity (cd):** | 4x20 |
| **Light sharing:** | Symmetric |
| **Light Outlet:** | Indirect |
| **Number of Lamps (pcs):** | 4 |
| **Number of LED (pcs):** | 1 |
| **Life Time:** | L70 50 000h Ta 25°C |
| **Nominel Life Time (h):** | 50000 |
| **Lumen maintenance 50 000h:** | L70 |
| **LLMF @ 50 000h:** | 0.7 |
| **Life Time Driver:** | 50 000h/10% |

## TECHNICAL DATA

| | |
|---|---|
| **Voltage (type):** | AC |
| **Voltage Interval (V):** | 220...240V |
| **Voltage Nominal (V):** | 230 |
| **Line Frequency (Hz):** | 50 |
| **Voltage Forward (Vf):** | 0,8 |
| **Max. Power Luminaire (W):** | 0,8 |
| **Max. System Power (W):** | 4,5 |
| **Max. Efficiency Luminaire (lm/W):** | 6,3 |
| **Max. Efficiency System (lm/W):** | 1,1 |

## OPERATION AND CONNECTION

| | |
|---|---|
| **Dimmable:** | No |
| **Type of Dimming:** | OnOff |
| **Driver Included:** | Yes |
| **Driver Model:** | Constant Voltage |
| **Driver Type:** | Stand Alone |
| **Connection (type):** | Cord Set, Screw Connection |
| **Length Connection (cm):** | 50 |
| **Connection (mm2):** | 2x0,5 |
| **Operating Temperature:** | -15...+40°C |
| **Max. Tc (°C):** | 60 |


## COLOR AND MATERIAL

| | |
|---|---|
| **Material:** | Stainless Steel |
| **Color:** | Stainless Steel |

## MEASUREMENT AND INSTALLATION

| | |
|---|---|
| **Operating Environment:** | Indoor / wet locations, Outdoor |
| **IP Degree of Protection:** | 44 |
| **Protection Class:** | III |
| **Installation:** | Built-in |
| **Mounting Installation:** | Tension Spring |
| **Max. Pressure (kg):** | 100 |
| **Approval Marks:** | CE |
| **Height (mm):** | 27 |
| **Diameter (mm):** | 32 |
| **Weight (kg):** | 0,8 |
| **Min. Built-in (mm):** | Ø28x25 |
| **Height Exterior Part (mm):** | 4 |
| **Built-in Ø (mm):** | 28mm |




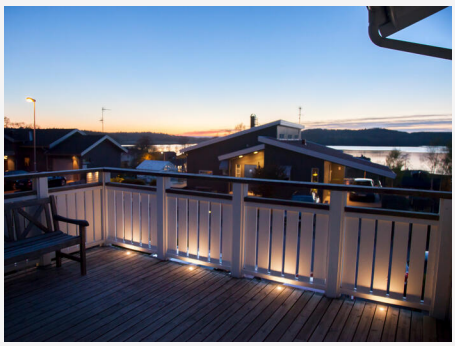









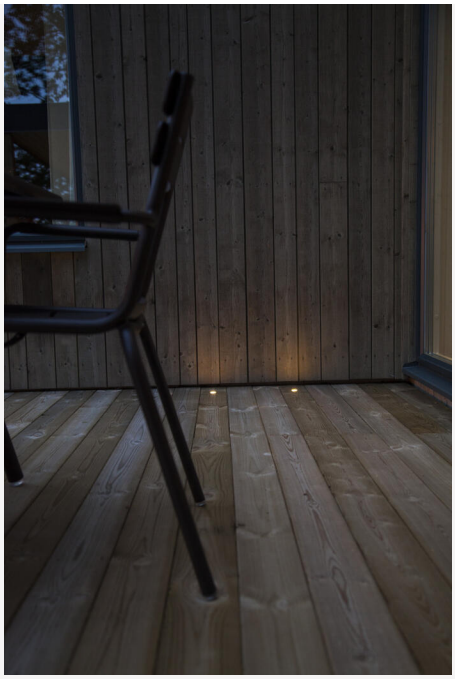


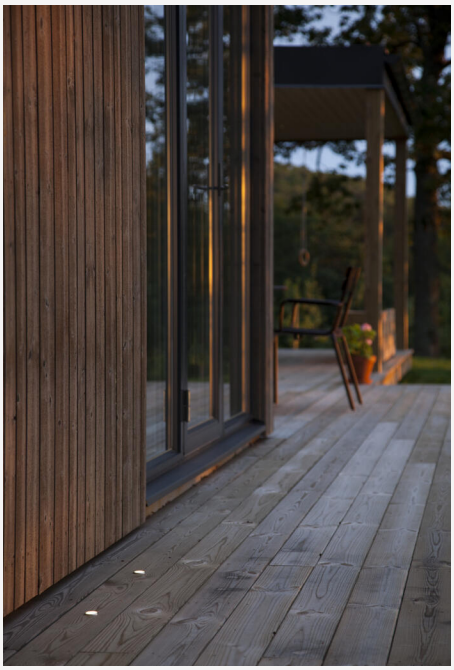


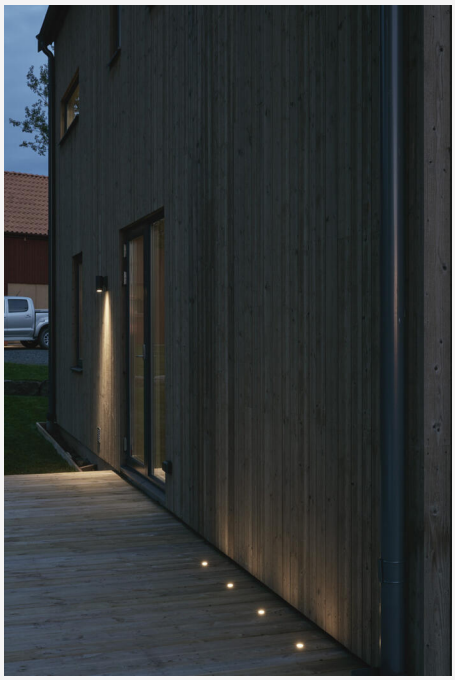



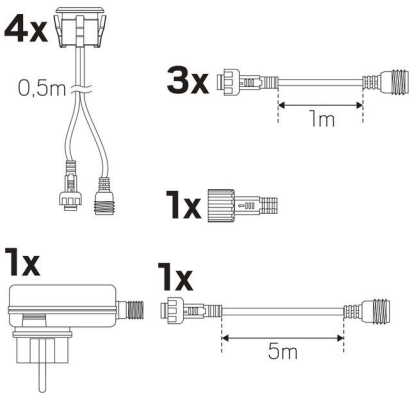


4x
0,5m
3x
1m
1x
1x
1x
5m

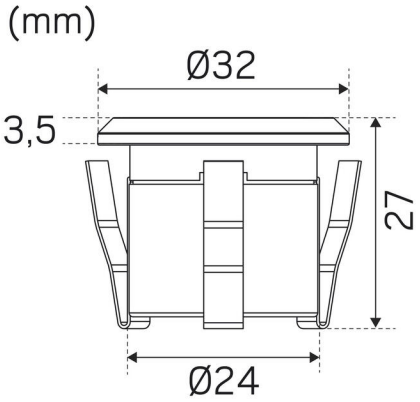
(mm)
Ø32
3,5
27
Ø24