hidealite | Elektro Elco AB Tallvägen 5, 564 35 Bankeryd, Sweden
Phone + 46(0)36 290 60 00 | info@elco.se | www.hidealite.com





SPOTLIGHT GARDEN

A striking mini spot with low energy consumption. Small, adjustable and stylish luminaire for illuminating smaller objects in the garden, such as flower beds or small bushes and trees. Comes with 0.5 m rubber cable with screw connection, T-connection and ground spike. A transformer and 1 m or 5 m extension cable are available as accessories. Can be combined with Decklight Garden thanks to the common coupling system.

DESCRIPTION

GTIN:	7392971130132
Item Name:	Spotlight Garden
Warranty:	5 years

LIGHT TECHNICAL DATA

Max. Luminaire Lumen (lm):	40
Light Source:	LED
Replaceability:	Non-replaceaable LED
LED Colour:	Warm White
Colour Temperature (K):	3000
Colour Rendering Index (Ra):	>80
Colour Consistency (SDCM):	3
Luminous Intensity (cd):	150
Beam Angle (°):	36
Light sharing:	Symmetric
Light Outlet:	Indirect
Number of Lamps (pcs):	1
Number of LED (pcs):	1
Life Time:	L70 50 000h Ta 25°C
Nominel Life Time (h):	50000
Lumen maintenance 50 000h:	L70
LLMF @ 50 000h:	0.7

TECHNICAL DATA

Adjustable:	Yes
Tiltable (°):	90
Rotatable (°):	360
Voltage (type):	DC
Voltage Interval (V):	12...12V
Voltage Nominal (V):	12
Max. Power Luminaire (W):	0,8
Max. System Power (W):	0,8
Max. Efficiency Luminaire (lm/W):	50
Max. Efficiency System (lm/W):	50

OPERATION AND CONNECTION

Dimmable:	No
Type of Dimming:	OnOff
Driver Included:	No
Driver Model:	Constant Voltage
Connection (type):	Screw Terminals
Operating Temperature:	-15...+40°C
Max. Tc (°C):	40

COLOR AND MATERIAL

Material:	Aluminium
Color:	Aluminum
Color Cover Ring:	Aluminum

MEASUREMENT AND INSTALLATION

Operating Environment:	Indoor / wet locations, Outdoor
IP Degree of Protection:	67
Protection Class:	III
Installation:	Surface mounted
Mounting Installation:	Screw Mounting, Ground Spike
Approval Marks:	CE
Impact Strength:	IK10
Length (mm):	70
Height (mm):	70
Diameter (mm):	30
Weight (kg):	0,2











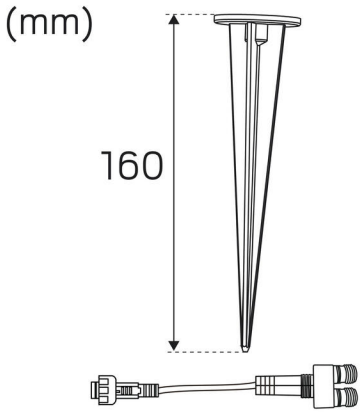


(mm)
160

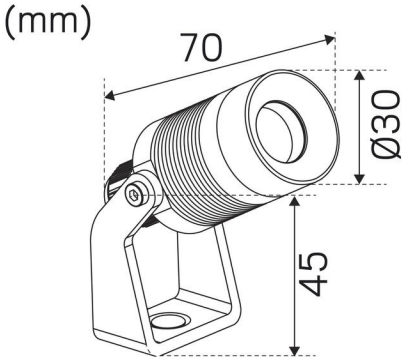
(mm)
70
Ø30
45

