hidealite | Elektro Elco AB Tallvägen 5, 564 35 Bankeryd, Sweden
Phone + 46(0)36 290 60 00 | info@elco.se | www.hidealite.com





DECKLIGHT GARDEN KIT

Kit with decorative luminaire with low energy consumption for striking lighting on a wooden deck. You can also increase security around your home by creating pleasant effects with outdoor lighting. Comes with 2x 0.5 m rubber cables with screw connections. The kit comprises 4x IP67 luminaires, 3x 1 m extension cables with quick connectors and 1x IP44 plug-in transformer with 5 m cable. Can be combined with Spotlight Garden thanks to the common coupling system.

DESCRIPTION

GTIN:	7392971130163
Item Name:	Decklight Garden Kit
Warranty:	5 years

LIGHT TECHNICAL DATA

Max. Luminaire Lumen (lm):	5
Light Source:	LED
Replaceability:	Non-replaceaable LED, Replaceable Control gear by end-user
LED Colour:	Warm White
Colour Temperature (K):	3000
Colour Rendering Index (Ra):	>80
Colour Consistency (SDCM):	3
Luminous Intensity (cd):	4x20
Light sharing:	Symmetric
Light Outlet:	Indirect
Number of Lamps (pcs):	4
Number of LED (pcs):	1
Life Time:	L70 50 000h Ta 25°C
Nominel Life Time (h):	50000
Lumen maintenance 50 000h:	L70
LLMF @ 50 000h:	0.7
Life Time Driver:	50 000h/10%

TECHNICAL DATA

Voltage (type):	AC
Voltage Interval (V):	220...240V
Voltage Nominal (V):	230
Line Frequency (Hz):	50
Voltage Forward (Vf):	0,8
Max. Power Luminaire (W):	0,8
Max. System Power (W):	4,5
Max. Efficiency Luminaire (lm/W):	6,3
Max. Efficiency System (lm/W):	1,1

OPERATION AND CONNECTION

Dimmable:	No
Type of Dimming:	OnOff
Driver Included:	Yes
Driver Model:	Constant Voltage
Driver Type:	Stand Alone
Connection (type):	Cord Set, Screw Connection
Length Connection (cm):	50
Connection (mm2):	2x0,5
Operating Temperature:	-15...+40°C
Max. Tc (°C):	60


COLOR AND MATERIAL

Material:	Stainless Steel
Color:	Stainless Steel

MEASUREMENT AND INSTALLATION

Operating Environment:	Indoor / wet locations, Outdoor
IP Degree of Protection:	44
Protection Class:	III
Installation:	Built-in
Mounting Installation:	Tension Spring
Max. Pressure (kg):	100
Approval Marks:	CE
Height (mm):	27
Diameter (mm):	32
Weight (kg):	0,8
Min. Built-in (mm):	Ø28x25
Height Exterior Part (mm):	4
Built-in Ø (mm):	28mm




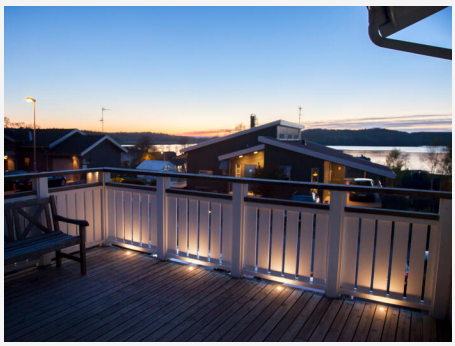









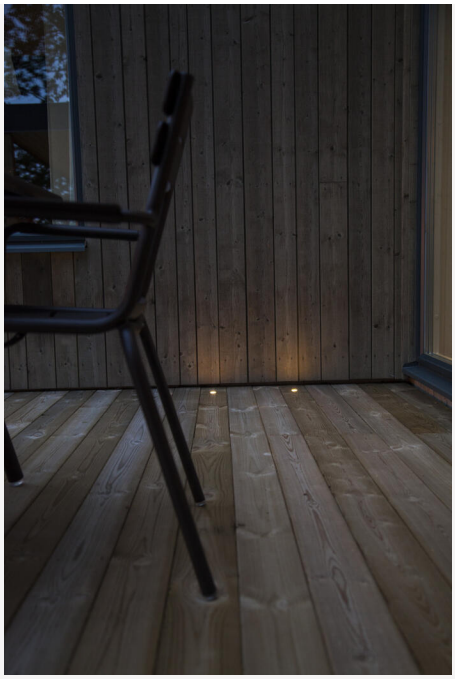


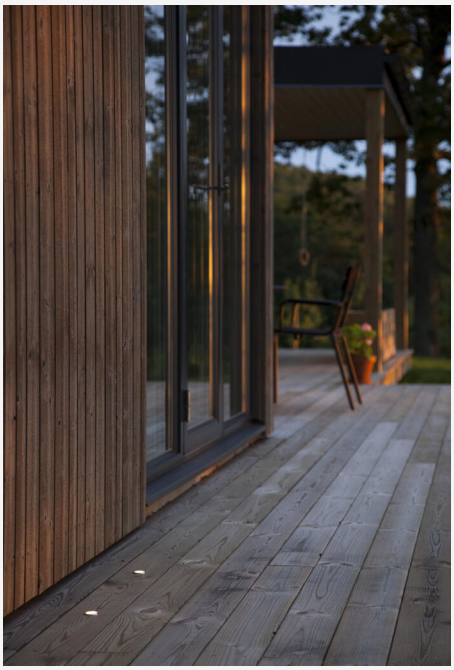


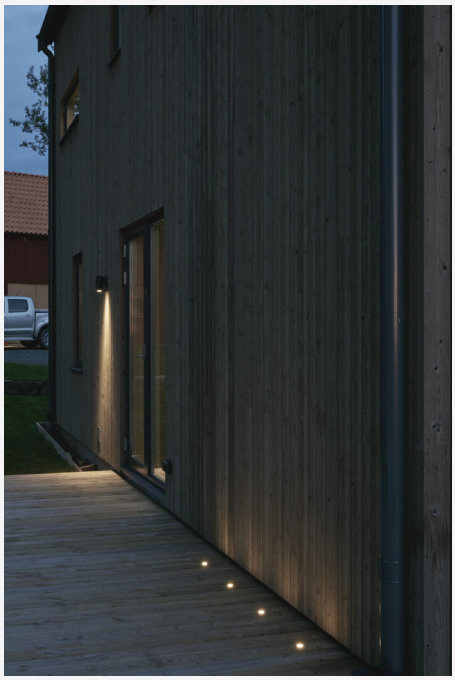



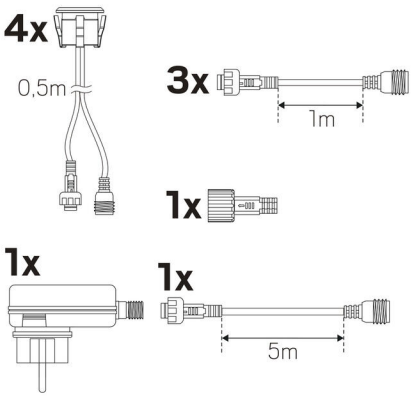


4x
0,5m
3x
1m
1x
1x
1x
5m

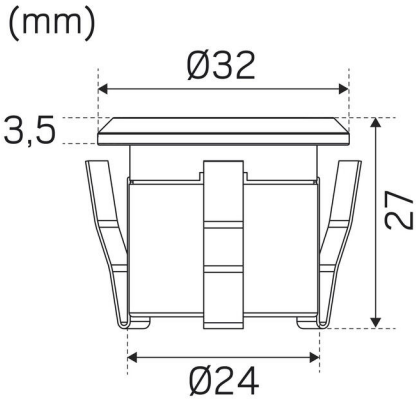
(mm)
Ø32
3,5
27
Ø24