hidealite | Elektro Elco AB Tallvägen 5, 564 35 Bankeryd, Sweden
Phone + 46(0)36 290 60 00 | info@elco.se | www.hidealite.com





DECKLIGHT GARDEN

A decorative and striking luminaire for wooden decks with low energy consumption. You can also increase security around your home by creating pleasant effects with outdoor lighting. Comes with 2x 0.5 m rubber cables with screw connections. A transformer and 1 m or 5 m extension cable are also available as accessories. Can be combined with Spotlight Garden thanks to the common coupling system.

DESCRIPTION

GTIN:	7392971130156
Item Name:	Decklight Garden
Warranty:	5 years

LIGHT TECHNICAL DATA

Max. Luminaire Lumen (lm):	5
Light Source:	LED
Replaceability:	Non-replaceaable LED
LED Colour:	Warm White
Colour Temperature (K):	3000
Colour Rendering Index (Ra):	>80
Colour Consistency (SDCM):	3
Luminous Intensity (cd):	20
Light sharing:	Symmetric
Light Outlet:	Indirect
Number of Lamps (pcs):	1
Number of LED (pcs):	1
Life Time:	L70 50 000h Ta 25°C
Nominel Life Time (h):	50000
Lumen maintenance 50 000h:	L70
LLMF @ 50 000h:	0.7

TECHNICAL DATA

Voltage (type):	DC
Voltage Interval (V):	12...12V
Voltage Nominal (V):	12
Max. Power Luminaire (W):	0,8
Max. System Power (W):	0,8
Max. Efficiency Luminaire (lm/W):	6,3
Max. Efficiency System (lm/W):	6,3

OPERATION AND CONNECTION

Dimmable:	No
Type of Dimming:	OnOff
Driver Included:	No
Driver Model:	Constant Voltage
Connection (type):	Screw Connection
Operating Temperature:	-15...+40°C
Max. Tc (°C):	60


COLOR AND MATERIAL

Material:	Stainless Steel
Color:	Stainless Steel

MEASUREMENT AND INSTALLATION


Operating Environment:	Indoor / wet locations, Outdoor
IP Degree of Protection:	67
Protection Class:	III
Installation:	Built-in
Mounting Installation:	Tension Spring
Max. Pressure (kg):	100
Approval Marks:	CE
Height (mm):	27
Diameter (mm):	32
Weight (kg):	0,11
Min. Built-in (mm):	Ø28x25
Height Exterior Part (mm):	4
Built-in Ø (mm):	28mm




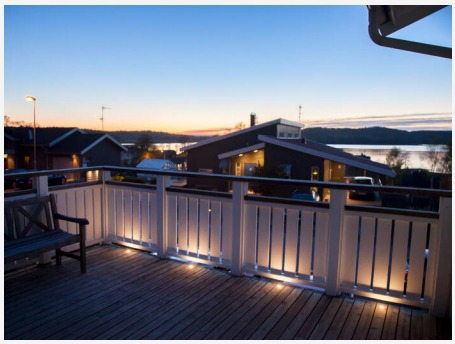







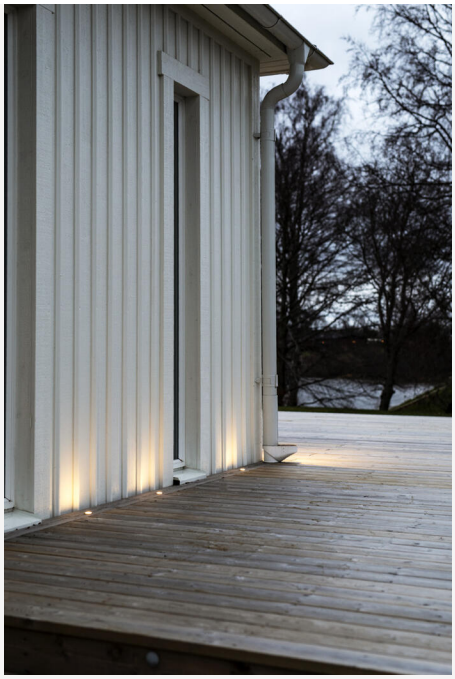

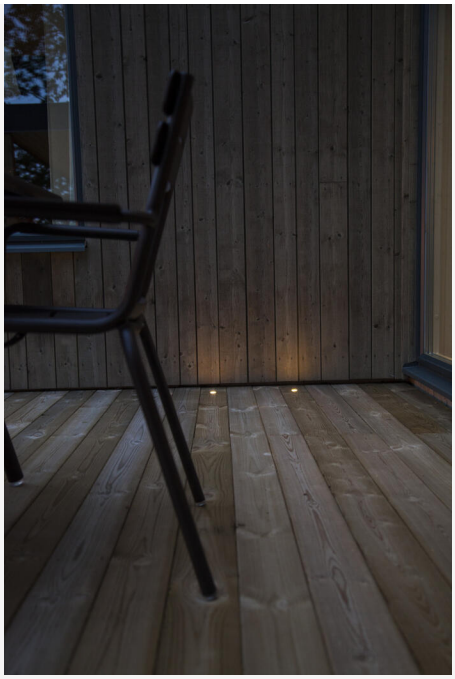


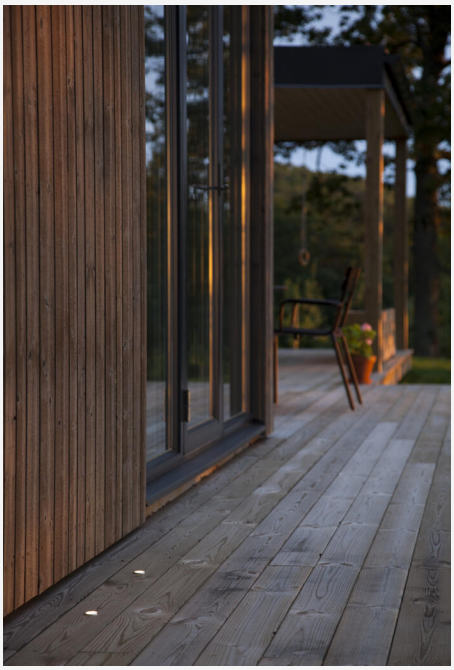

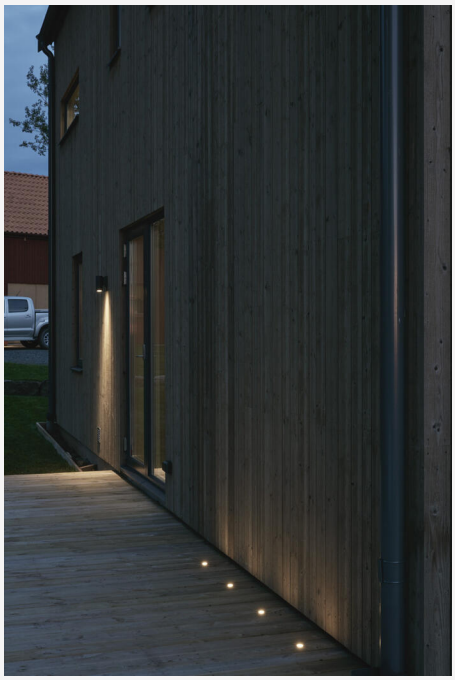



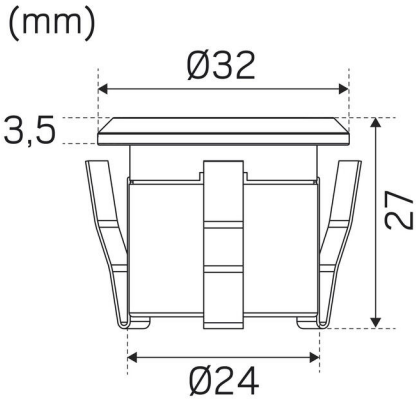


(mm)
Ø32
3,5
27
Ø24