hidealite | Elektro Elco AB Tallvägen 5, 564 35 Bankeryd, Sweden
Phone + 46(0)36 290 60 00 | info@elco.se | www.hidealite.com





STEPLIGHT GARDEN KIT

Kit for decorative step lighting with low energy consumption. Create striking staircase lighting, for example on patios and decks. The kit includes 4x IP67 luminaires, 3x 1m extension cables with quick connectors and 1x IP44 plug-in transformer with 5m cable. Can be combined with Spotlight Garden and Decklight Garden thanks to the common coupling system. Up to 12 luminaires can be connected to a single transformer.

DESCRIPTION

GTIN:	7392971133157
Item Name:	Steplight Garden Kit
Warranty:	5 years

LIGHT TECHNICAL DATA

Max. Luminaire Lumen (lm):	3
Light Source:	LED
Replaceability:	Non-replaceaable LED, Replaceable Control gear by end-user
LED Colour:	Warm White
Colour Temperature (K):	3000
Colour Rendering Index (Ra):	>80
Colour Consistency (SDCM):	3
Light sharing:	Asymmetric
Light Outlet:	Direct
Number of Lamps (pcs):	4
Number of LED (pcs):	1
Life Time:	L70 50 000h Ta 25°C
Nominel Life Time (h):	50000
Lumen maintenance 50 000h:	L70
LLMF @ 50 000h:	0.7
Life Time Driver:	50 000h/10%

TECHNICAL DATA

Voltage (type):	AC
Voltage Interval (V):	220...240V
Voltage Nominal (V):	230
Line Frequency (Hz):	50
Voltage Forward (Vf):	9
Max. Power Luminaire (W):	0,8
Max. System Power (W):	4,5
Max. Efficiency Luminaire (lm/W):	3,8
Max. Efficiency System (lm/W):	0,7

OPERATION AND CONNECTION

Dimmable:	No
Type of Dimming:	OnOff
Driver Included:	Yes
Driver Model:	Constant Voltage
Driver Type:	Stand Alone
Connection (type):	Screw Connection, Cable
Length Connection (cm):	50
Connection (mm2):	2x0,5
Through Wiring:	Yes
Operating Temperature:	-25...+45°C
Max. Tc (°C):	80


COLOR AND MATERIAL

Material:	Aluminium
Color:	Aluminum

MEASUREMENT AND INSTALLATION


Operating Environment:	Outdoor
IP Degree of Protection:	67
Protection Class:	III
Installation:	Built-in
Mounting Installation:	Tension Spring
Max. Pressure (kg):	100
Approval Marks:	CE
Height (mm):	34
Diameter (mm):	36
Weight (kg):	0,71
Min. Built-in (mm):	Ø28x25
Height Recessed Part (mm):	23
Height Exterior Part (mm):	13
Built-in Ø (mm):	28mm

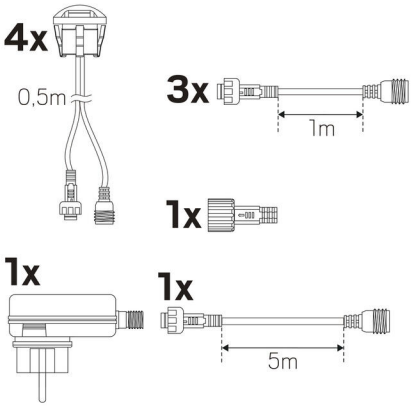


4x
0,5m
3x
1m
1x
1x
1x
5m



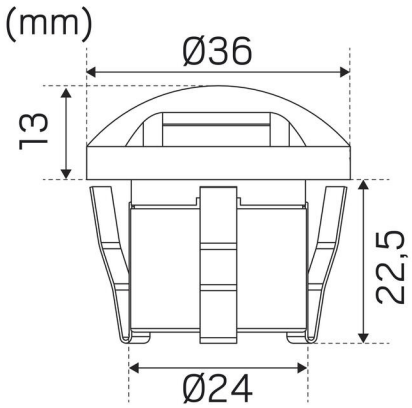


(mm)
Ø36
13
22,5
Ø24