hidealite | Elektro Elco AB Tallvägen 5, 564 35 Bankeryd, Sweden
Phone + 46(0)36 290 60 00 | info@elco.se | www.hidealite.com





DECKLIGHT SUPER GARDEN KIT

Kit with accent luminaire in IP67 for e.g. wooden decks, stone walls and embedment. Use clips for optimal grip even in living materials, such as wood. Supplied with 2 0.5m rubber cables with screw connections and transformers in IP44 placed above ground. The kit includes 2pcs IP67 luminaires, 1pc 1m extension cable with quick connection and 1 Trafo Garden 12W with 5m cable. Can be combined with all luminaires in the Garden family thanks to the common connection system.

DESCRIPTION

GTIN:	7392971135038
Item Name:	Decklight Super Garden Kit
Warranty:	5 years

LIGHT TECHNICAL DATA

Max. Luminaire Lumen (lm):	75
Light Source:	LED
Replaceability:	Non-replaceaable LED, Replaceable Control gear by end-user
LED Colour:	Warm White
Colour Temperature (K):	3000
Colour Rendering Index (Ra):	>90
Colour Consistency (SDCM):	3
Luminous Intensity (cd):	2x115
Beam Angle (°):	45
Light sharing:	Symmetric
Light Outlet:	Direct
Number of Lamps (pcs):	2
Number of LED (pcs):	1
Life Time:	L70 100 000h Ta 25°C
Nominel Life Time (h):	100000
Lumen maintenance 100 000h:	L70
LLMF @ 100 000h:	0.7
Life Time Driver:	50 000h/10%

TECHNICAL DATA

Voltage (type):	DC
Voltage Interval (V):	12...12V
Voltage Nominal (V):	12
Line Frequency (Hz):	50
Voltage Forward (Vf):	9
Max. Power Luminaire (W):	1,1
Max. System Power (W):	2,75
Max. Efficiency Luminaire (lm/W):	68,2
Max. Efficiency System (lm/W):	27,3
Containing light source energy efficiency class (EU) 2019/2015:	G
Eprel registration number:	1371056

OPERATION AND CONNECTION

Dimmable:	No
Type of Dimming:	OnOff
Driver Included:	Yes
Driver Model:	Constant Voltage
Driver Type:	Stand Alone
Connection (type):	Plug-in, Quick Connection
Length Connection (cm):	50
Connection (mm2):	2x0,5
Through Wiring:	Yes
Strain Relief:	Yes
Operating Temperature:	-25...+45°C
Max. Tc (°C):	80

COLOR AND MATERIAL

Material:	Aluminium
Color:	Aluminum

MEASUREMENT AND INSTALLATION

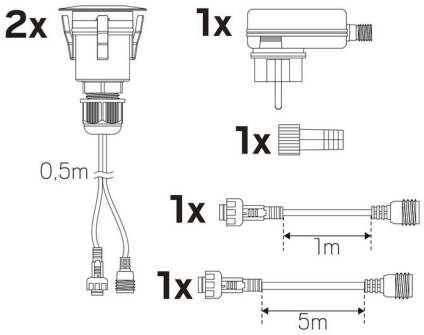
Operating Environment:	Indoor / wet locations, Outdoor
IP Degree of Protection:	67
Protection Class:	III
Installation:	Built-in
Mounting Installation:	Tension Spring, Mounting Sleeve
Max. Pressure (kg):	100
Approval Marks:	CE
Impact Strength:	IK08
Filament Test IEC 695-2-1(°C):	650
Height (mm):	63
Diameter (mm):	42
Weight (kg):	0,4634
Min. Built-in (mm):	Ø30x71
Height Recessed Part (mm):	60
Height Exterior Part (mm):	3
Built-in Ø (mm):	34mm

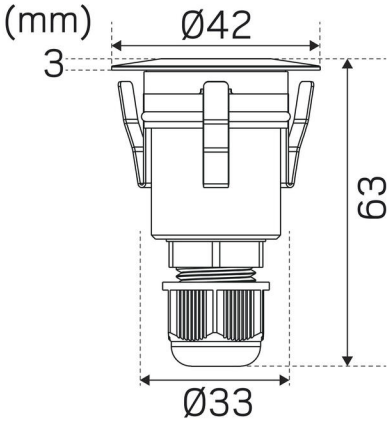





hidealite


hidealite


2x
0,5m
1x
1x
1x
1m
1x
5m


(mm)
Ø42
3
63
Ø33