hidealite | Elektro Elco AB Tallvägen 5, 564 35 Bankeryd, Sweden
Phone + 46(0)36 290 60 00 | info@elco.se | www.hidealite.com





OPTIC G2 QUICK ISO DALI WHITE 3000K

Downlight made for a sustainable future – easily dismantled via a module system to save time when recycling. Low-build and adapted for installation in 28mm secondary spaced boarding directly against insulation. Modern LED and reflector technology with good glare-free light distribution and high lumen output. Tiltable 30°, which also makes it the perfect choice for sloping ceilings. Very good colour rendering, Ra>95. Driver comes together with Q-Box Micro, which can be adapted for cable or flex hose 16mm without any tools. Comes with 3-pole push-in terminal for through wiring and strain relief. Suitable for 45mm secondary spaced boarding and hole size 83 mm. The driver is also equipped with DIP-switch so you can adjust to the desired lumen output without any tools. Dimmable with most common dimmers on the market.

DESCRIPTION

GTIN:	7392971146782
Item Name:	Optic G2 Quick ISO DALI White 3000K
Warranty:	5 years

LIGHT TECHNICAL DATA

Max. Luminaire Lumen (lm):	500
Light Source:	LED
Replaceability:	Replaceable LED by professional, Replaceable Control gear by professional
LED Colour:	Warm White
Colour Temperature (K):	3000
Colour Rendering Index (Ra):	>98
Colour Consistency (SDCM):	3
Luminous Intensity (cd):	810
Beam Angle (°):	36
Light sharing:	Symmetric
Light Outlet:	Direct
Number of Lamps (pcs):	1
Number of LED (pcs):	1
Life Time:	L80 100 000h Ta 25°C
Nominel Life Time (h):	100000
Lumen maintenance 50 000h:	L91
Lumen maintenance 75 000h:	L87
Lumen maintenance 100 000h:	L83
LLMF @ 50 000h:	0.91
LLMF @ 100 000h:	0.83
Life Time Driver:	50 000h/10%
Flicker (PstLM):	0,012
Stroboscopic effect (SVM):	0,002

TECHNICAL DATA

Adjustable:	Yes
Tiltable (°):	30
Voltage (type):	AC
Voltage Interval (V):	220...240V
Voltage Nominal (V):	230
Line Frequency (Hz):	50, 60
Power LED (W):	4,8
Max. Power Luminaire (W):	6
Max. System Power (W):	6
Max. Efficiency Luminaire (lm/W):	83,3
Max. Efficiency System (lm/W):	83,3
Containing light source energy efficiency class (EU) 2019/2015:	E
Eprel registration number:	1102074

OPERATION AND CONNECTION



Dimmable:	Yes
Type of Dimming:	Push 230V, DALI 2
Driver Included:	Yes
Driver Model:	Constant Current
Driver Type:	Stand Alone
Driver Manufacturer:	Hide-a-lite
Connection (type):	Quick Terminal
Connection (mm2):	5x0,5-2,5
Through Wiring:	Yes
Strain Relief:	Yes
Power Factor ʎ:	0,9
Efficiency (%):	78
Power loss (W):	1,2
Leakage current (mA) (at 230 V, 50 Hz, full load):	0,05
THD (%):	20
Constant Current (mA):	270
Operating Temperature:	-20...+40°C
Max. Tc (°C):	85
Dimming secondary side:	AM
Inrush current (max/time):	16A 20µs
Fuse B10 (pcs):	65
Fuse B16 (pcs):	104
Fuse C10 (pcs):	75
Fuse C16 (pcs):	120

COLOR AND MATERIAL


Material:	Aluminium
Color:	White
Environmental Assessment:	Byggvarubedömningen, EPD


MEASUREMENT AND INSTALLATION

Operating Environment:	Indoor / bathroom (ceiling area 1), Outdoor
IP Degree of Protection:	44
Protection Class:	II
Installation:	Built-in
Mounting Installation:	Mounting Spring
Ceiling Thickness Interval (mm):	3-26mm
Fire Safety Marks:	Approved for installation against insulation
Approval Marks:	CE, a Hide-a-lite Choice
Height (mm):	41
Diameter (mm):	95
Weight (kg):	0,26
Min. Built-in (mm):	170x120x38
Height Recessed Part (mm):	38
Height Exterior Part (mm):	3
Built-in Ø (mm):	83-85mm




(mm)
Ø71
38
41,5
Ø95

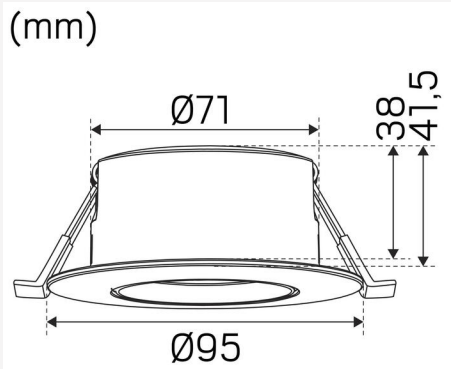
(mm)
27,5
DALI-driver
60
88
100
Qbox Micro
27
60
96

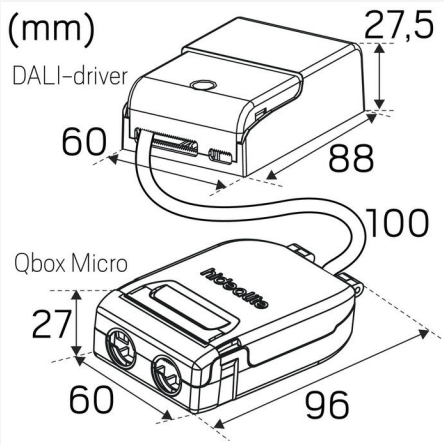
B