hidealite | Elektro Elco AB Tallvägen 5, 564 35 Bankeryd, Sweden
Phone + 46(0)36 290 60 00 | info@elco.se | www.hidealite.com





OPTIC G2 L QUICK ISO DALI WHITE 36° TUNE

Downlight made for a sustainable future – easily dismantled via a module system to save time when recycling. Big brother of the Optic family, perfect for high ceilings. Low build, suited for installation in 28mm secondary spaced boarding and directly against insulation. Modern LED and reflector technology with good glare-free light distribution and high lumen output. Tiltable 30°, which also makes it the perfect choice for sloping ceilings. Very good colour rendering, Ra>95. Driver with cover that can be adapted for cable or flex hose 16mm. Comes with 3-pole push-in terminal for through wiring and strain relief. Driver comes together with Q-Box Micro. This luminaire is dimmable with the most commonly available dimmers on the market.

DESCRIPTION

GTIN:	7392971147017
Item Name:	Optic G2 L Quick ISO DALI White 36° Tune
Warranty:	5 years

LIGHT TECHNICAL DATA

Max. Luminaire Lumen (lm):	460
Light Source:	LED
Replaceability:	Replaceable LED by professional, Replaceable Control gear by professional
LED Colour:	Tune
Colour Temperature (K):	2700
Range Colour Temperature (K):	Tune 2000-2700
Colour Rendering Index (Ra):	>95
Colour Consistency (SDCM):	3
Luminous Intensity (cd):	780
Beam Angle (°):	36
Light sharing:	Symmetric
Light Outlet:	Direct
Number of Lamps (pcs):	1
Number of LED (pcs):	1
Life Time:	L80 100 000h Ta 25°C
Nominel Life Time (h):	100000
Lumen maintenance 50 000h:	L91
Lumen maintenance 75 000h:	L83
Lumen maintenance 100 000h:	L82
LLMF @ 50 000h:	0.91
LLMF @ 100 000h:	0.82
Life Time Driver:	50 000h/10%
Flicker (PstLM):	0,003
Stroboscopic effect (SVM):	0,02

TECHNICAL DATA

Adjustable:	Yes
Tiltable (°):	30
Voltage (type):	AC
Voltage Interval (V):	220...240V
Voltage Nominal (V):	230
Line Frequency (Hz):	50
Power LED (W):	6,5
Max. Power Luminaire (W):	7,5
Max. System Power (W):	7,5
Max. Efficiency Luminaire (lm/W):	61,3
Max. Efficiency System (lm/W):	61,3

Containing light source energy efficiency class (EU) 2019/2015: F

Eprel registration number:	1023985

OPERATION AND CONNECTION

Dimmable:	Yes
Type of Dimming:	Push 230V, DALI 2
Driver Included:	Yes
Driver Model:	Constant Current
Driver Type:	Stand Alone
Driver Manufacturer:	Hide-a-lite
Connection (type):	Quick Terminal
Connection (mm2):	5x0,5-2,5
Through Wiring:	Yes
Strain Relief:	Yes
Power Factor λ:	0,95
Efficiency (%):	80
Power loss (W):	1
Leakage current (mA) (at 230 V, 50 Hz, full load):	0,05
THD (%):	20
Standby Power:	0,5
Constant Current (mA):	180
Operating Temperature:	-20...+40°C
Max. Tc (°C):	85
Dimming secondary side:	AM
Memory Function Power Failure:	Yes
Protection Against:	Short Circuit, Overload
Inrush current (max/time):	16A 20µs
Mains surge protection DM (kV):	500
Mains surge protection CM (kV):	1000
Fuse B10 (pcs):	65
Fuse B16 (pcs):	104
Fuse C10 (pcs):	75
Fuse C16 (pcs):	120


COLOR AND MATERIAL


Material:	Aluminium
Color:	White
Environmental Assessment:	Byggvarubedömningen, EPD

MEASUREMENT AND INSTALLATION

Operating Environment:	Indoor / bathroom (ceiling area 1), Outdoor
IP Degree of Protection:	44
Protection Class:	II
Installation:	Built-in
Mounting Installation:	Mounting Spring
Ceiling Thickness Interval (mm):	3-26mm
Fire Safety Marks:	Approved for installation against insulation
Protection Cover:	7466700, 7466701, 7466702
Approval Marks:	CE, SELV, a Hide-a-lite Choice
Filament Test IEC 695-2-1(°C):	650
Height (mm):	41
Diameter (mm):	95
Weight (kg):	0,331
Min. Built-in (mm):	170x120x38
Height Recessed Part (mm):	38
Height Exterior Part (mm):	3
Built-in Ø (mm):	83-85mm

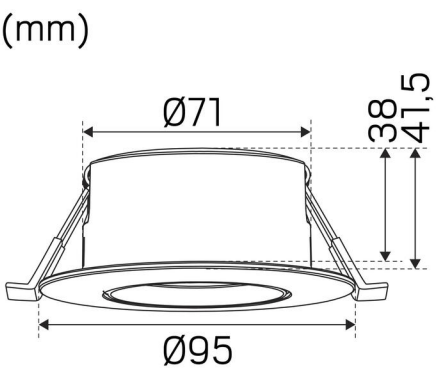


(mm)
Ø71
38
41,5
Ø95

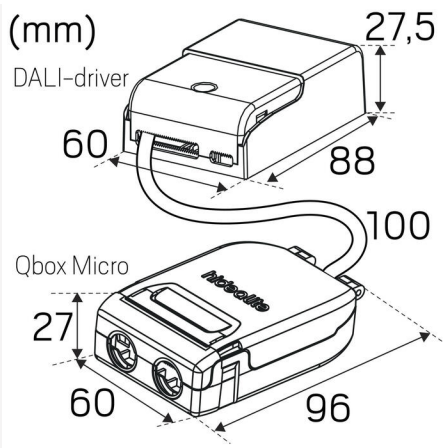
(mm)
27,5
DALI-driver
60
88
100
Qbox Micro
27
60
96






B