



SHADE OAK 3000K

Modern LED luminaire with retro-look and pleasant indirect up and downlight, giving a decorative light pattern on the wall. Perfect as decorative lighting in both private and public areas. Versions available in wood veneer or white enamel aluminium. Comes complete with integrated dimmable driver. Dimmable with the most commonly available dimmers on the market.

DESCRIPTION

GTIN:	7392971129433
Item Name:	Shade Oak 3000K
Warranty:	5 years

LIGHT TECHNICAL DATA

Max. Luminaire Lumen (lm):	470
Light Source:	LED
Replaceability:	Replaceable LED by professional, Replaceable Control gear by professional
LED Colour:	Warm White
Colour Temperature (K):	3000
Colour Rendering Index (Ra):	>90
Colour Consistency (SDCM):	3
Beam Angle (°):	150
Light sharing:	Symmetric
Light Outlet:	Indirect
Number of Lamps (pcs):	1
Number of LED (pcs):	1
Life Time:	L70 50000h Ta 25°C
Nominal Life Time (h):	50000
Flicker (PstLM):	0,04
Stroboscopic effect (SVM):	0,03

TECHNICAL DATA

Voltage (type):	AC
Voltage Interval (V):	220...240V
Voltage Nominal (V):	230
Line Frequency (Hz):	50
Max. Power Luminaire (W):	9
Max. System Power (W):	9
Max. Efficiency Luminaire (lm/W):	52,2
Max. Efficiency System (lm/W):	52,2
Containing light source energy efficiency class (EU) 2019/2015: E	

OPERATION AND CONNECTION


Dimmable:	Yes
Type of Dimming:	Trailing Edge
Driver Included:	Yes
Driver Model:	Constant Current
Connection (type):	Screw Terminals
Constant Current (mA):	500
Min. Ta (°C):	-20
Max. Ta (°C):	45
Max. Tc (°C):	80
Fuse B10 (pcs):	140
Fuse B16 (pcs):	224
Fuse C10 (pcs):	280
Fuse C16 (pcs):	448

COLOR AND MATERIAL

Material:	Aluminium
Color:	Oak
Environmental Assessment:	Byggvarubedömningen

MEASUREMENT AND INSTALLATION

Operating Environment:	Indoor / dry locations
IP Degree of Protection:	20
Protection Class:	I
Installation:	Surface mounted
Mounting Installation:	Screw Mounting
Approval Marks:	CE
Width (mm):	220
Height (mm):	95
Depth (mm):	68
Weight (kg):	0,57

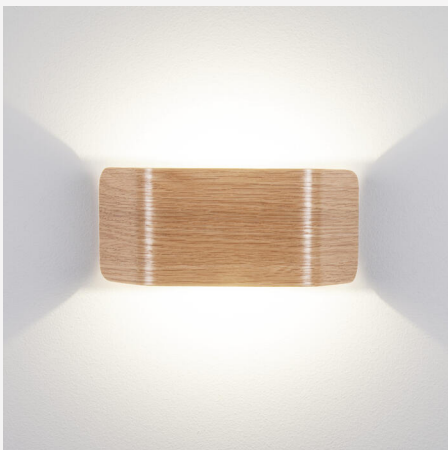

(mm)

