hidealite | Elektro Elco AB Tallvägen 5, 564 35 Bankeryd, Sweden
Phone + 46(0)36 290 60 00 | info@elco.se | www.hidealite.com





SPOT IT MULTI 26 16° 3000K

Compact projector spot for public environments. Perfect for illuminating parks, high building facades, signs and industrial properties. Narrow beam angle, 16°. Luminaire housing of cast aluminium, corrosion-treated and powder coated in a mat silver-grey colour. Installed with bracket or together with a ground spike or post bracket. Can also be supplemented with anti-glare shield. Comes complete with integrated driver, 2m rubber cable and ground spike.

DESCRIPTION

GTIN:	7392971135823
Item Name:	Spot It Multi 26 16° 3000K
Warranty:	5 years

LIGHT TECHNICAL DATA

Max. Luminaire Lumen (lm):	2320
Light Source:	LED
Replaceability:	Non-replaceaable LED, Non-replaceable Control gear
LED Colour:	Warm White
Colour Temperature (K):	3000
Colour Rendering Index (Ra):	>80
Colour Consistency (SDCM):	3
Luminous Intensity (cd):	15200
Beam Angle (°):	16
Light sharing:	Symmetric
Light Outlet:	Direct
Number of Lamps (pcs):	1
Number of LED (pcs):	1
Life Time:	L70 50 000h Ta 25°C
Nominel Life Time (h):	50000
Lumen maintenance 50 000h:	L75
LLMF @ 50 000h:	0.75
Life Time Driver:	50 000h/5%
Flicker (PstLM):	0,08
Stroboscopic effect (SVM):	0,04

TECHNICAL DATA

Adjustable:	Yes
Tiltable (°):	180
Rotatable (°):	360
Voltage (type):	AC
Voltage Interval (V):	220...240V
Voltage Nominal (V):	230
Line Frequency (Hz):	50
Power LED (W):	21,6
Max. Power Luminaire (W):	26
Max. System Power (W):	26
Max. Efficiency Luminaire (lm/W):	89,2
Max. Efficiency System (lm/W):	89,2

Containing light source energy efficiency class (EU) 2019/2015: D

OPERATION AND CONNECTION

Dimmable:	No
Type of Dimming:	OnOff
Driver Included:	Yes
Driver Model:	Constant Current
Driver Type:	Built-in
Connection (type):	Cable, Open Cable End
Length Connection (cm):	200
Connection (mm2):	3x0,75
Leakage current (mA) (at 230 V, 50 Hz, full load):	0,11
Constant Current (mA):	600
Operating Temperature:	-20...+50°C
Max. Tc (°C):	75
Inrush current (max/time):	29A 78µs
Fuse B10 (pcs):	37
Fuse B16 (pcs):	57
Fuse C10 (pcs):	37
Fuse C16 (pcs):	57

COLOR AND MATERIAL

Material:	Diecasted, Aluminium
Color:	Silver
Environmental Assessment:	Byggvarubedömningen

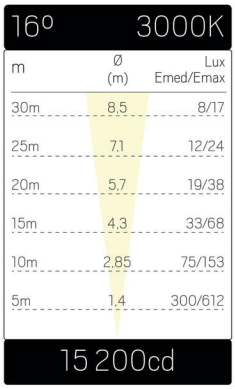
MEASUREMENT AND INSTALLATION

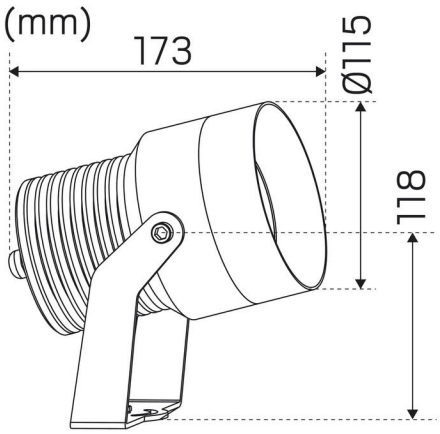
Operating Environment:	Indoor / wet locations, Outdoor
IP Degree of Protection:	65
Protection Class:	I
Installation:	Surface mounted
Mounting Installation:	Screw Mounting
Approval Marks:	CE
Impact Strength:	IK08
Length (mm):	173
Height (mm):	118
Diameter (mm):	115
Weight (kg):	2,5

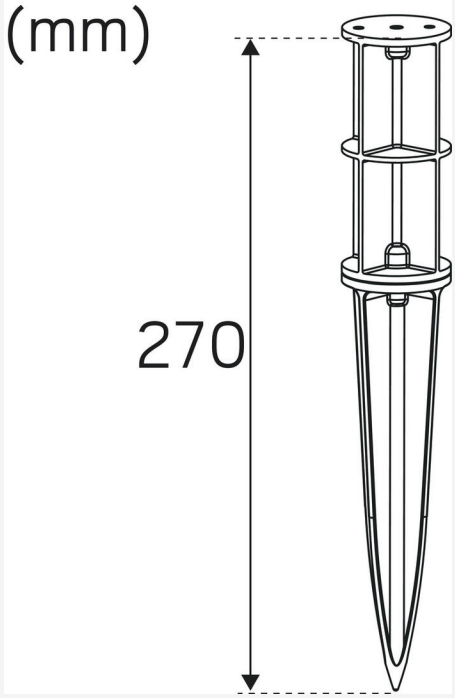







16º
3000K
m
Ø (m)
Lux Emed/Emax
30m
8,5
8/17
25m
7,1
12/24
20m
5,7
19/38
15m
4,3
33/68
10m
2,85
75/153
5m
1,4
300/612
15 200cd


(mm)
173
Ø115
118


(mm)
270


B