



## LEDSTRIP R IP67 12V 3000K 5M

Flexible LED strips with very good colour rendering, Ra>90, and lumen output adjusted to attain a beautiful fill and raking light. The high IP degree of protection means it is suitable as decoration lighting for both indoor and outdoor use, such as a stair rail or illuminating lines around a shop window. Suits our range of aluminium profiles perfectly. Comes with 2 m of connecting cable at each end, 2pcs shrink hoses, 10pcs clips, 20pcs screws and self-adhesive tape for easy installation. Also available made to measure in optional lengths. Upon request, running meters with connection cables are delivered according to your specifications; running meters are delivered as standard without connection cables. LEDstrip 12V has a somewhat lower lumen output than LEDstrip 24V. Drivers are ordered separately according to required dimmer technology and placing.

### DESCRIPTION

<b>GTIN:</b>	7392971125602
<b>Item Name:</b>	LEDstrip R IP67 12V 3000K 5m
<b>Warranty:</b>	5 years

### LIGHT TECHNICAL DATA

<b>Max. Luminaire Lumen (lm):</b>	1275
<b>Light Source:</b>	LED
<b>Light Source Included:</b>	Yes
<b>Replaceability:</b>	Non-replaceable LED
<b>LED Colour:</b>	Warm White
<b>Colour Temperature (K):</b>	3000
<b>Colour Rendering Index (Ra):</b>	>90
<b>Colour Consistency (SDCM):</b>	3
<b>Luminous Intensity (cd):</b>	75
<b>Beam Angle (°):</b>	120
<b>Light sharing:</b>	Symmetric
<b>Light Outlet:</b>	Direct
<b>Number of Lamps (pcs):</b>	1
<b>Number of LED (pcs):</b>	300
<b>LED Pitch (mm):</b>	16
<b>Life Time:</b>	L70 40000h Ta 25°C
<b>Nominal Life Time (h):</b>	40000

## TECHNICAL DATA

Voltage (type):	DC
Voltage Interval (V):	12...12V
Voltage Nominal (V):	12
Max. Power Luminaire (W):	24
Max. System Power (W):	26,4
Max. Efficiency Luminaire (lm/W):	53,1
Max. Efficiency System (lm/W):	48,3
Energy Efficiency Class (EU) 2019/2015:	G
Eprel registration number:	915146

## OPERATION AND CONNECTION

Dimmable:	Yes
Driver Included:	No
Driver Model:	Constant Voltage
Connection (type):	Cable
Length Connection (cm):	200
Connection (mm <sup>2</sup> ):	2x0,5
Min. Ta (°C):	-20
Max. Ta (°C):	40

## COLOR AND MATERIAL

Material:	Copper, PVC
Color:	White
Environmental Assessment:	Byggvarubedömningen

## MEASUREMENT AND INSTALLATION

Operating Environment:	Indoor / wet locations, Outdoor
IP Degree of Protection:	67
Protection Class:	III
Installation:	Surface mounted
Mounting Installation:	Self Adhesive Tape
Approval Marks:	CE
Length (mm):	5000
Width (mm):	10
Height (mm):	6
Weight (kg):	0,36


## LEDSTRIPS

Min. Bend Radius (mm):	60
Min. Length (m):	0,05
Max. Length (m):	10
Cutting Increments (mm):	50






included



(mm)

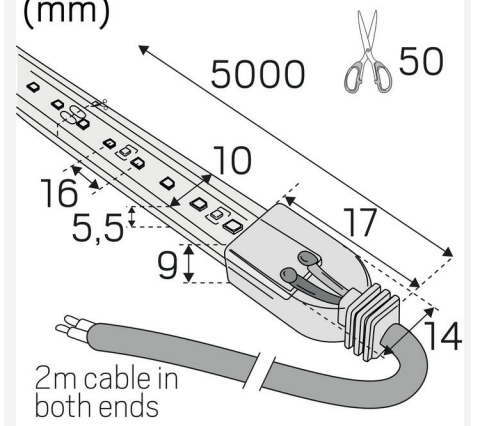



Hide-a-lite

7501315

A

B

C

D

E

F

G

G

24  
kWh/1000h



2019/2015

