



LEDSTRIP R IP67 12V 3000K 5M

Flexible LED strips with very good colour rendering, $Ra > 90$, and lumen output adjusted to attain a beautiful fill and raking light. The high IP degree of protection means it is suitable as decoration lighting for both indoor and outdoor use, such as a stair rail or illuminating lines around a shop window. Suits our range of aluminium profiles perfectly. Comes with 2 m of connecting cable at each end, 2 pcs shrink hoses, 10 pcs clips, 20 pcs screws and self-adhesive tape for easy installation. Also available made to measure in optional lengths. Upon request, running meters with connection cables are delivered according to your specifications; running meters are delivered as standard without connection cables. LEDstrip 12V has a somewhat lower lumen output than LEDstrip 24V. Drivers are ordered separately according to required dimmer technology and placing.

DESCRIPTION

GTIN:	7392971125602
Item Name:	LEDstrip R IP67 12V 3000K 5m
Warranty:	5 years

LIGHT TECHNICAL DATA

Max. Luminaire Lumen (lm):	1275
Light Source:	LED
Replaceability:	Non-replaceable LED
LED Colour:	Warm White
Colour Temperature (K):	3000
Colour Rendering Index (Ra):	>90
Colour Consistency (SDCM):	3
Luminous Intensity (cd):	75
Beam Angle (°):	120
Light sharing:	Symmetric
Light Outlet:	Direct
Number of Lamps (pcs):	1
Number of LED (pcs):	300
LED Pitch (mm):	16
Life Time:	h Ta °C
Nominal Life Time (h):	40000

TECHNICAL DATA

Voltage (type):	DC
Voltage Interval (V):	12...12V
Voltage Nominal (V):	12
Max. Power Luminaire (W):	24
Max. System Power (W):	26,4
Max. Efficiency Luminaire (lm/W):	53,1
Max. Efficiency System (lm/W):	48,3
Energy Efficiency Class (EU) 2019/2015:	G
Eprel registration number:	915146

OPERATION AND CONNECTION

Dimmable:	Yes
Driver Included:	No
Driver Model:	Constant Voltage
Connection (type):	Cable
Length Connection (cm):	200
Connection (mm ²):	2x0,5
Min. Ta (°C):	-20
Max. Ta (°C):	40

COLOR AND MATERIAL

Material:	Copper, PVC
Color:	White
Environmental Assessment:	Byggvarubedömningen

MEASUREMENT AND INSTALLATION

Operating Environment:	Indoor / wet locations, Outdoor
IP Degree of Protection:	67
Protection Class:	III
Installation:	Surface mounted
Mounting Installation:	Self Adhesive Tape
Approval Marks:	CE
Length (mm):	5000
Width (mm):	10
Height (mm):	6
Weight (kg):	0,36


LEDSTRIPS

Min. Bend Radius (mm):	60
Min. Length (m):	0,05
Max. Length (m):	10
Cutting Increments (mm):	50






included



(mm)

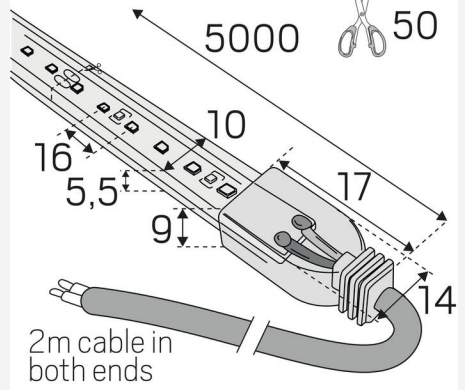



Hide-a-lite

7501315



24
kWh/1000h

