



## LEDSTRIP RX HDI IP20 24V 3000K LPM

LEDstrip with short spacing between LEDs giving high lumen output with very good light quality and colour rendering, Ra>90. Perfect for a homogenous light with opal cover- also with lower profiles. Also available made to measure in optional lengths with 5cm cut-off intervals. Upon request, running meters with connection cables are delivered according to your specifications; running meters are delivered as standard without connection cables. Drivers are ordered separately according to required dimmer technology and placing.

### DESCRIPTION

<b>GTIN:</b>	7392971134666
<b>Item Name:</b>	LEDstrip RX HDI IP20 24V 3000K lpm
<b>Warranty:</b>	5 years

### LIGHT TECHNICAL DATA

<b>Min. Armaturlumen (lm):</b>	2580
<b>Max. Luminaire Lumen (lm):</b>	2580
<b>Light Source:</b>	LED
<b>Replaceability:</b>	Non-replaceable LED
<b>LED Colour:</b>	Warm White
<b>Colour Temperature (K):</b>	3000
<b>Colour Rendering Index (Ra):</b>	>90
<b>Colour Consistency (SDCM):</b>	3
<b>Luminous Intensity (cd):</b>	600
<b>Beam Angle (°):</b>	120
<b>Light sharing:</b>	Symmetric
<b>Light Outlet:</b>	Direct
<b>Number of Lamps (pcs):</b>	1
<b>Number of LED (pcs):</b>	140
<b>LED Pitch (mm):</b>	7
<b>Life Time:</b>	h Ta °C
<b>Nominel Life Time (h):</b>	50000

## TECHNICAL DATA

Voltage (type):	DC
Voltage Interval (V):	24...24V
Voltage Nominal (V):	24
Voltage Forward (Vf):	3
Max. Power Luminaire (W):	19,2
Max. System Power (W):	21,12
Max. Efficiency Luminaire (lm/W):	134,4
Max. Efficiency System (lm/W):	122,2
Energy Efficiency Class (EU) 2019/2015:	F
Eprel registration number:	917842

## OPERATION AND CONNECTION

Dimmable:	Yes
Driver Included:	No
Driver Model:	Constant Voltage
Min. Ta (°C):	-20
Max. Ta (°C):	45
Max. Tc (°C):	75

## COLOR AND MATERIAL

Material:	Copper
Color:	White
Environmental Assessment:	Byggvarubedömningen

## MEASUREMENT AND INSTALLATION


Operating Environment:	Indoor / dry locations
IP Degree of Protection:	20
Protection Class:	III
Installation:	Surface mounted
Mounting Installation:	Self Adhesive Tape
Approval Marks:	CE
Requires cooling:	Yes
Length (mm):	1000
Width (mm):	8
Height (mm):	2
Weight (kg):	0,15

## LEDSTRIPS

Min. Bend Radius (mm):	60
Min. Length (m):	0,05
Max. Length (m):	5
Cutting Increments (mm):	50




(mm)

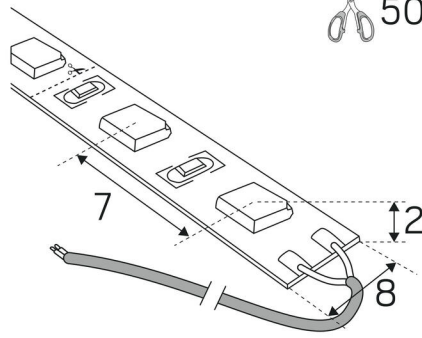

**Hide-a-lite**

7504658

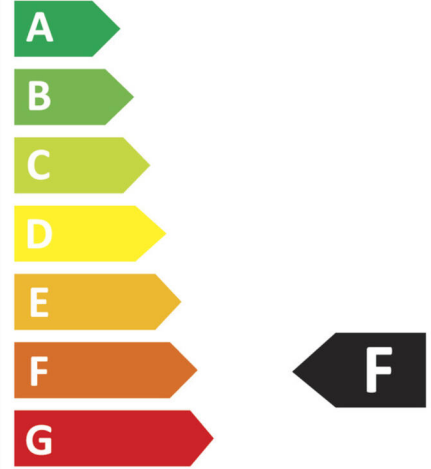

**19**  
kWh/1000h

