



LEDSTRIP RX HDI IP20 24V 4000K LPM

LEDstrip with short spacing between LEDs giving high lumen output with very good light quality and colour rendering, Ra>90. Perfect for a homogenous light with opal cover- also with lower profiles. Also available made to measure in optional lengths with 5cm cut-off intervals. Upon request, running meters with connection cables are delivered according to your specifications; running meters are delivered as standard without connection cables. Drivers are ordered separately according to required dimmer technology and placing.

DESCRIPTION

GTIN:	7392971137575
Item Name:	LEDstrip RX HDI IP20 24V 4000K lpm
Warranty:	5 years

LIGHT TECHNICAL DATA

Max. Luminaire Lumen (lm):	2600
Light Source:	LED
Replaceability:	Non-replaceable LED
LED Colour:	White
Colour Temperature (K):	4000
Colour Rendering Index (Ra):	>90
Colour Consistency (SDCM):	3
Luminous Intensity (cd):	650
Beam Angle (°):	120
Light sharing:	Symmetric
Light Outlet:	Direct
Number of Lamps (pcs):	1
Number of LED (pcs):	140
LED Pitch (mm):	7
Life Time:	h Ta °C
Nominal Life Time (h):	50000

TECHNICAL DATA

Voltage (type):	DC
Voltage Interval (V):	24...24V
Voltage Nominal (V):	24
Voltage Forward (Vf):	3
Max. Power Luminaire (W):	19,2
Max. System Power (W):	21,12
Max. Efficiency Luminaire (lm/W):	135,4
Max. Efficiency System (lm/W):	123,1
Energy Efficiency Class (EU) 2019/2015:	E
Eprel registration number:	918017

OPERATION AND CONNECTION

Dimmable:	Yes
Driver Included:	No
Driver Model:	Constant Voltage
Min. Ta (°C):	-20
Max. Ta (°C):	45
Max. Tc (°C):	75

COLOR AND MATERIAL

Material:	Copper
Color:	White
Environmental Assessment:	Byggvarubedömningen

MEASUREMENT AND INSTALLATION


Operating Environment:	Indoor / dry locations
IP Degree of Protection:	20
Protection Class:	III
Installation:	Surface mounted
Mounting Installation:	Self Adhesive Tape
Approval Marks:	CE
Requires cooling:	Yes
Length (mm):	1000
Width (mm):	8
Height (mm):	2
Weight (kg):	0,15

LEDSTRIPS

Min. Bend Radius (mm):	60
Min. Length (m):	0,05
Max. Length (m):	5
Cutting Increments (mm):	50



(mm)

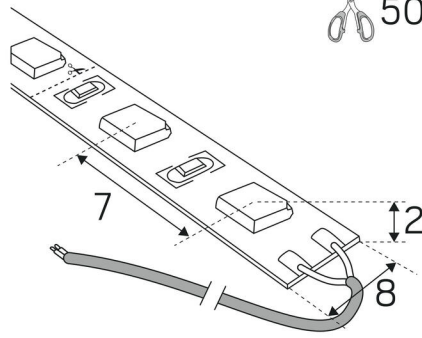

Hide-a-lite

7505725



19
kWh/1000h



2019/2015

