



## LEDSTRIP 24V IP67 MIDLUM 4000K 5M

Basic version of our 24V LEDstrip, with 120 LED/m there is lots of light and good efficiency. The smaller gap between diodes gives a homogeneous light with opal cover also in lower profiles. Comes in 5m lengths with self-adhesive tape, 2m connecting cable at each end, 2 x 10stpcs 10cm shrink hoses, 10pcs clips and 20pcs screws. Also available made to measure in optional lengths with 50mm cut-off intervals and maximum length 10m. Drivers are ordered separately according to required dimmer technology and placing.

### DESCRIPTION

<b>GTIN:</b>	7392971141978
<b>Item Name:</b>	LEDstrip 24V IP67 Midlum 4000K 5m
<b>Warranty:</b>	5 years

### LIGHT TECHNICAL DATA

<b>Max. Luminaire Lumen (lm):</b>	5200
<b>Light Source:</b>	LED
<b>Replaceability:</b>	Non-replaceable LED
<b>LED Colour:</b>	White
<b>Colour Temperature (K):</b>	4000
<b>Colour Rendering Index (Ra):</b>	>90
<b>Colour Consistency (SDCM):</b>	3
<b>Luminous Intensity (cd):</b>	330
<b>Beam Angle (°):</b>	120
<b>Light sharing:</b>	Symmetric
<b>Light Outlet:</b>	Direct
<b>Number of Lamps (pcs):</b>	1
<b>Number of LED (pcs):</b>	600
<b>LED Pitch (mm):</b>	8
<b>Life Time:</b>	h Ta °C
<b>Nominal Life Time (h):</b>	50000
<b>Lumen maintenance 50 000h:</b>	L77
<b>Lumen maintenance 75 000h:</b>	L71
<b>LLMF @ 50 000h:</b>	0.77

## TECHNICAL DATA

Voltage (type):	DC
Voltage Interval (V):	24...24V
Voltage Nominal (V):	24
Voltage Forward (Vf):	3
Max. Power Luminaire (W):	60
Max. System Power (W):	66
Max. Efficiency Luminaire (lm/W):	86,7
Max. Efficiency System (lm/W):	78,8
Energy Efficiency Class (EU) 2019/2015:	F
Eprel registration number:	894213

## OPERATION AND CONNECTION

Dimmable:	Yes
Driver Included:	No
Driver Model:	Constant Voltage
Connection (type):	Cable
Length Connection (cm):	200
Connection (mm <sup>2</sup> ):	2x0,5
Min. Ta (°C):	-20
Max. Ta (°C):	45
Max. Tc (°C):	75

## COLOR AND MATERIAL


Material:	Copper
Color:	White
Environmental Assessment:	Byggsvarubedömningen

## MEASUREMENT AND INSTALLATION


Operating Environment:	Indoor / bathroom (ceiling area 1), Outdoor
IP Degree of Protection:	67
Protection Class:	III
Installation:	Surface mounted
Mounting Installation:	Clips, Self Adhesive Tape
Approval Marks:	CE
Requires cooling:	No
Length (mm):	5000
Width (mm):	10
Height (mm):	6
Weight (kg):	0,56

## LEDSTRIPS

Min. Bend Radius (mm):	30
Min. Length (m):	0,05
Max. Length (m):	10
Cutting Increments (mm):	50

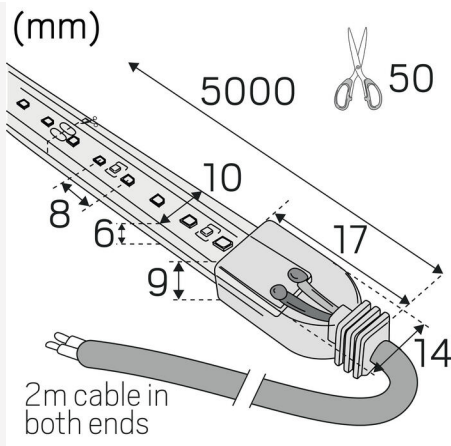

included



**Hide-a-lite**

7507433



**60**  
kWh/1000h



2019/2015

