


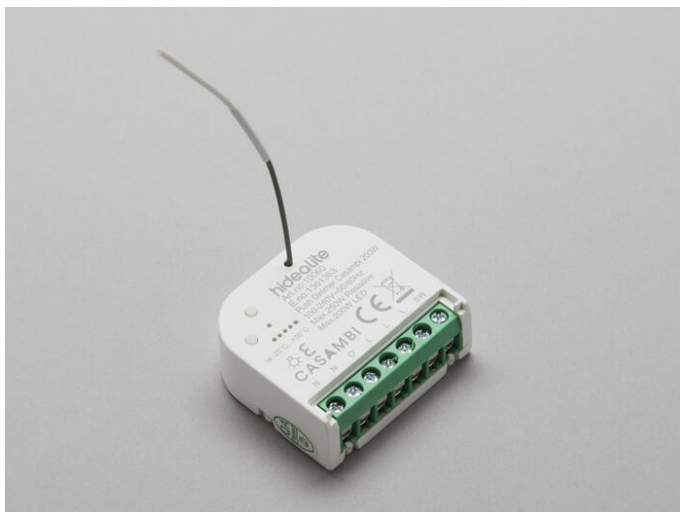

PUSH DIMMER CASAMBI 200W

Casambi offers wireless lighting control where devices communicate via Casambi Mesh. A flexible system for controlling luminaires, drivers, sensors, and push buttons, designed for both new and existing lighting installations.

Light Technical Data

Technical data

Available for various load types and control protocols, such as 230V, 12–24 VDC, DALI, and 0/1–10V. Refer to each specific product for load capacity, power supply, connection, and additional technical specifications.

Operation and Connection

Color and material

Measurement and installation

Compact units for easy and flexible installation in or adjacent to luminaires, junction boxes, or flush-mounted boxes. Suitable for both new installations and retrofitting existing lighting solutions.

Controls

Control lighting wirelessly via the Casambi app or with push buttons, and automate control using sensors. Switch on, switch off, and dim lighting, adjust color temperature (Tunable White), control RGB/RGBW, and create lighting scenes.

DESCRIPTION

GTIN:	7392971158761
Item Name:	Push Dimmer Casambi 200W
Warranty:	5 years

TECHNICAL DATA

Voltage (type):	AC
Voltage Interval (V):	100...240V
Voltage Nominal (V):	230
Line Frequency (Hz):	50, 60
Max LED load (230V trailing edge):	200

OPERATION AND CONNECTION

Dimmable:	Yes
Type of Dimming:	Casambi, Push 230V, Trailing Edge
Connection (type):	Screw Terminals
Strain Relief:	No
Voltage Output Interval (V):	100-240V
Standby Power:	1
Current (A):	0,7
Push button inputs:	1 pc
Min. Ta (°C):	-25
Max. Ta (°C):	50
Operating Temperature:	-25...+50°C
Max. Tc (°C):	85
Memory Function Power Failure:	Yes
Protection Against:	Short Circuit, Overload, Overheating 90°C

COLOR AND MATERIAL

Material:	Plastic
Color:	White

MEASUREMENT AND INSTALLATION

Operating Environment:	Indoor / dry locations
IP Degree of Protection:	20
Protection Class:	II
Installation:	Built-in
Mounting Installation:	Screw Mounting
Fire Safety Marks:	Not in insulation without protection cover
Approval Marks:	CE
Filament Test IEC 695-2-1(°C):	650
Length (mm):	38
Width (mm):	42
Height (mm):	16
Weight (kg):	0,022

