

hidealite | Elektro Elco AB Tallvägen 5, 564 35 Bankeryd, Sweden
Phone + 46(0)36 290 60 00 | info@elco.se | www.hidealite.com

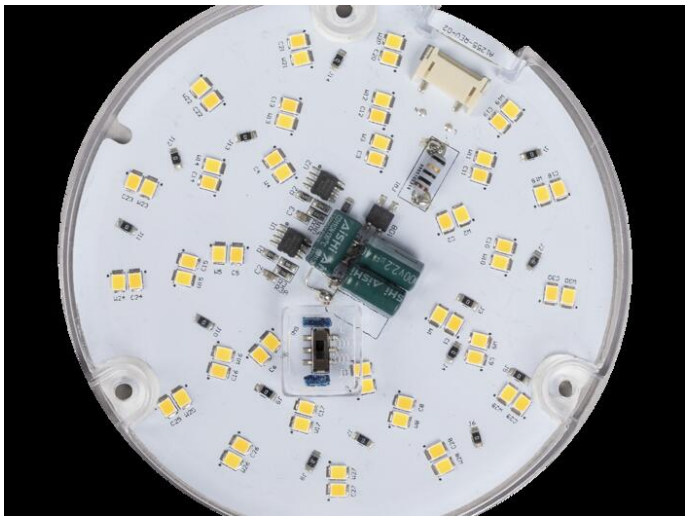

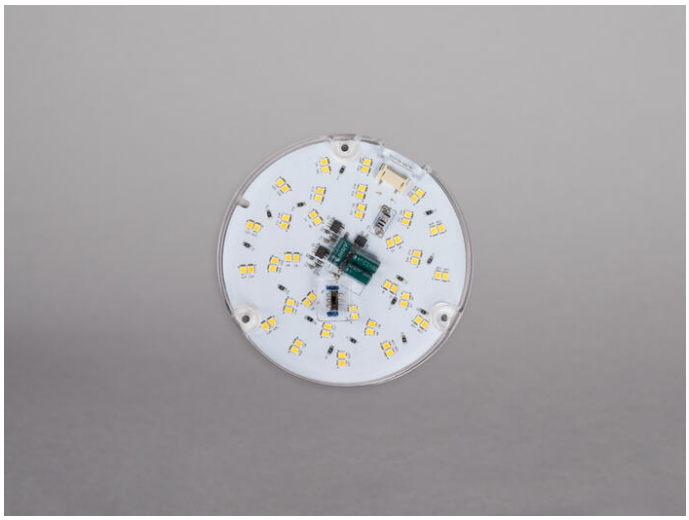

LED LIGHT SOURCE MOON PUBLIC 3000K/4000K

Exchangeable 230V LED module for Hide-a-lite Moon Public series for easy maintenance. Choose between 3000K or 4000K via integrated DIP-switch.

DESCRIPTION

GTIN:	7392971136325
Item Name:	LED Light Source Moon Public 3000K/4000K
Warranty:	5 years

LIGHT TECHNICAL DATA

Max. Luminaire Lumen (lm):	1650
LED Colour:	Warm White
Colour Temperature (K):	3000, 4000
Colour Rendering Index (Ra):	>80
Colour Consistency (SDCM):	4
Beam Angle (°):	180
Light Outlet:	Direct
Number of LED (pcs):	60
Life Time:	L80 50 000h Ta 25°C
Nominel Life Time (h):	50000

TECHNICAL DATA

Weighted Energy Consumption (kWh/1000h):	0
Wattage Nominal (W):	16
Rated Wattage (W):	16
Wattage Equivalent (W):	0
Power Reference (W):	0
Voltage (type):	AC
Voltage Interval (V):	220...240V
Voltage Nominal (V):	230
Line Frequency (Hz):	50
Power LED (W):	13
Energy Efficiency Class (EU) 2019/2015:	E
Eprel registration number:	773889

OPERATION AND CONNECTION

Dimmable:	No
Connection (type):	Mini Contact
Operating Temperature:	-35...+45°C
Max. Tc (°C):	85

COLOR AND MATERIAL

Material:	Aluminium, Plastic
Color:	White

MEASUREMENT AND INSTALLATION

Approval Marks:	CE
Filament Test IEC 695-2-1(°C):	650
Height (mm):	11
Diameter (mm):	115
Weight (kg):	0,07

