

hidealite | Elektro Elco AB Tallvägen 5, 564 35 Bankeryd, Sweden
Phone + 46(0)36 290 60 00 | info@elco.se | www.hidealite.com

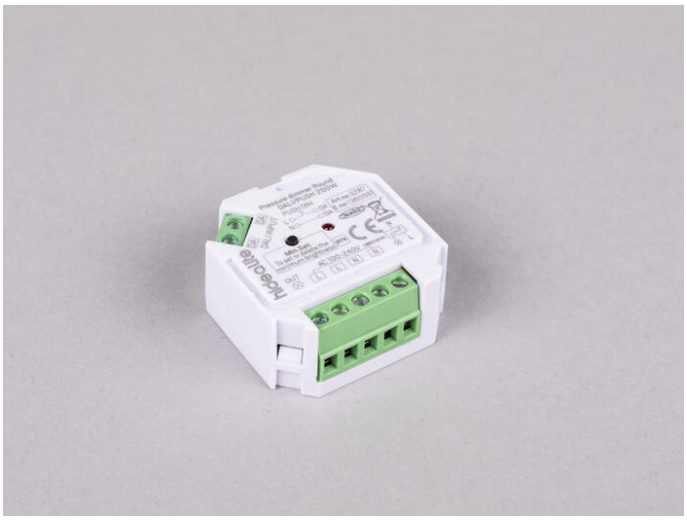

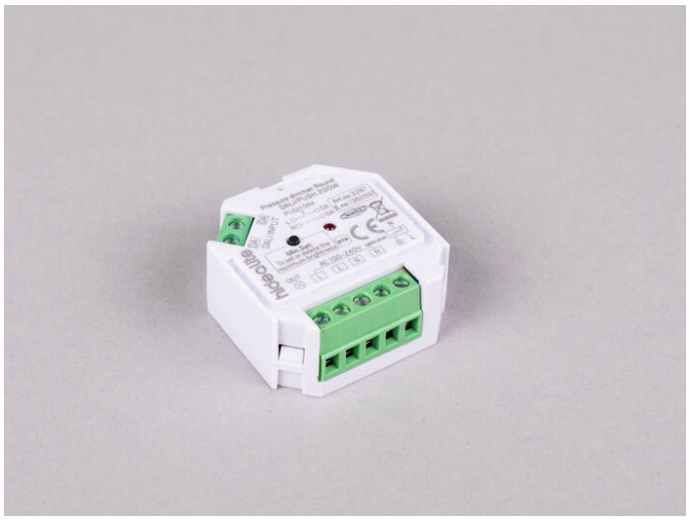

PUSH DIMMER ROUND DALI/PUSH 200W

Small and versatile dimmer puck for mains dimmable drivers and luminaires. For installation in appliance or junction box. Dimmable on the primary side via Push (230V) or DALI signal. Push dimmer Round DALI has screw terminals that can manage cables up to 2.5 mm² and memory function which lights up with latest set value after power failure. For further technical information see instruction manual.

DESCRIPTION

GTIN:	7392971136783
Item Name:	Push dimmer Round DALI/PUSH 200W
Warranty:	5 years

LIGHT TECHNICAL DATA

Life Time Driver:	50 000h/15%

TECHNICAL DATA

Voltage (type):	AC
Voltage Interval (V):	110...240V
Voltage Nominal (V):	230
Line Frequency (Hz):	50, 60

OPERATION AND CONNECTION

Dimmable:	Yes
Type of Dimming:	Push 230V, DALI 2
Driver Type:	Built-in
Connection (type):	Screw Terminals
Connection (mm2):	2x0,5-2,5
Through Wiring:	Yes
Connection Secondary (type):	Screw Terminals
Secondary Connection (mm2):	2x0,5-2,5
Power Interval for Catalogue (W):	1-200
Max. Power (W):	200
Standby Power:	1
Current (A):	1,5
Operating Temperature:	1828
Max. Tc (°C):	85
Dimming secondary side:	PWM
Frequency PWM dimming (Hz):	>300
Memory Function Power Failure:	Yes
Protection Against:	Short Circuit, Overheating 110°C, Overload
Fuse B10 (pcs):	8
Fuse B16 (pcs):	12
Fuse C10 (pcs):	8
Fuse C16 (pcs):	13

COLOR AND MATERIAL

Material:	Plastic
Color:	White
Environmental Assessment:	Byggvarubedömningen

MEASUREMENT AND INSTALLATION

Operating Environment:	Indoor / dry locations
IP Degree of Protection:	20
Protection Class:	II
Installation:	Built-in
Mounting Installation:	Screw Mounting
Fire Safety Marks:	MM-mark
Approval Marks:	CE
Filament Test IEC 695-2-1(°C):	650
Length (mm):	45,5
Width (mm):	45
Height (mm):	21
Weight (kg):	0,08
Built-in Ø (mm):	53mm





