



A++

SKYLITE MP 4900/840

Efficient LED panel IP44 with microprismatic louvre for very good luminous comfort in office environments, meets the requirements for displayscreen work. High lumen output and very good efficiency. Body in white enamelled aluminium RAL 9016. Recessed mounting in suspended ceilings with visible support profile, can be complemented with frame for surface mounting. On/Off comes with 2m pre-wired cord set and earthed plug, DALI comes with driver installed in Q-Box with push-in, loop-in, loop-out terminals and screwless strain relief.

DESCRIPTION

GTIN:	7392971131221
Item Name:	Skylite MP 4900/840
Warranty:	5 years

LIGHT TECHNICAL DATA

Light Source:	LED
Light Source Included (type):	LED not exchangeable
LED Colour:	White
Colour Temperature (K):	4000
Colour Rendering Index (Ra):	>80
Colour Consistency (SDCM):	3
Luminous Intensity (cd):	2370
Luminaire Lumen (lm):	4880
Beam Angle (°):	90
Light sharing:	Symmetric
Light Outlet:	Direct
Number of Lamps (pcs):	1
Number of LED (pcs):	264
Life Time:	(L70 B50) 60 000h Ta 25°C
Nominal Life Time (h):	60000
Life Time Driver:	50 000h/10%

TECHNICAL DATA

Adjustable:	No
Voltage (type):	AC
Voltage Interval (V):	220...240
Voltage Nominal (V):	230
Line Frequency (Hz):	50, 60
Power Luminaire (W):	38
System Power (W):	38
Efficiency Luminaire (lm/W):	128
Efficiency System (lm/W):	128
Energy Efficiency Class:	A++

OPERATION AND CONNECTION


Driver Included:	Yes
Driver Type:	Stand Alone
Connection (type):	Cord Set
Length Connection (cm):	250
Through Wiring:	No
Strain Relief:	Yes
Operating Temperature:	-15...+45
Max. Tc (°C):	85
Dimmable:	No
Fuse B10 (pcs):	31
Fuse B16 (pcs):	50
Fuse C10 (pcs):	52
Fuse C16 (pcs):	85


COLOR AND MATERIAL

Material:	Extruded, Aluminium
Color:	White
Color Code (RAL):	9016
Halogen free:	No

MEASUREMENT AND INSTALLATION


Operation Environment:	Indoor
IP Degree of Protection:	44
Installation:	Built-in, Surface mounted
Approval Marks:	CE
Impact Strength:	IK06
Filament Test IEC 695-2-1(°C):	650
Protection Class:	I
Length (mm):	595
Width (mm):	595
Height (mm):	10
Weight (kg):	3
Height Recessed Part (mm):	10
Built-in LxB (mm):	600x600

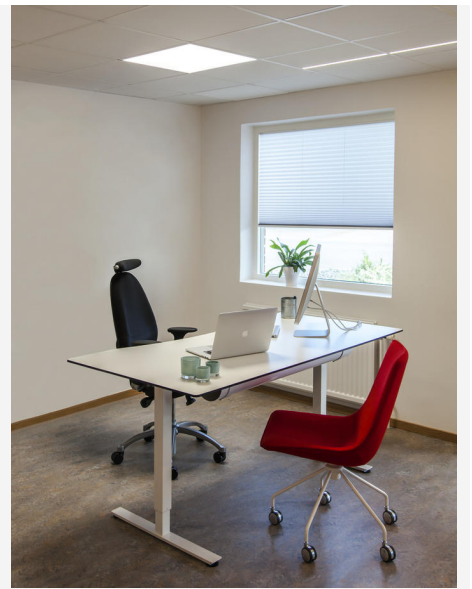


 This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

hideolite Skylite 874/2012

 } LED



(mm)

