



A+

FOCUS TRACK GIGA DALI 60° WHITE 3000K

Stylish anti-glare luminaire in solid and smooth droplet design with integrated DALI driver. The latest LED technology and Comfort Lens provide superb light quality with high luminous comfort and RA>90. For accent lighting or general lighting in most environments. 3-phase Global Trac DALI adapter for Global Trac Pulse track systems or equivalent. Can be complemented with accessories to change light pattern and reduce glare.

DESCRIPTION

GTIN:	7392971132341
Item Name:	Focus Track Giga DALI 60° White 3000K
Warranty:	5 years
Type:	.

LIGHT TECHNICAL DATA

Light Source:	LED
Light Source Included (type):	LED not exchangeable
LED Colour:	Warm White
Colour Temperature (K):	3000
Colour Rendering Index (Ra):	>90
Colour Consistency (SDCM):	3
Luminous Intensity (cd):	3130
Luminaire Lumen (lm):	3010
Beam Angle (°):	60
Light sharing:	Symmetric
Light Outlet:	Direct
Number of Lamps (pcs):	1
Number of LED (pcs):	1
Life Time:	(L70 B10) 100 000h Ta 25°C
Nominal Life Time (h):	100 000
Life Time Driver:	50 000h/10%

TECHNICAL DATA

Adjustable:	Yes
Tilttable (°):	90
Rotatable (°):	350
Voltage (type):	AC
Voltage Interval (V):	220...240
Voltage Nominal (V):	230
Line Frequency (Hz):	50
Power LED (W):	34
Power Luminaire (W):	38
System Power (W):	38
Efficiency LED (lm/W):	89
Efficiency Luminaire (lm/W):	79
Efficiency System (lm/W):	79
Energy Efficiency Class:	A+

OPERATION AND CONNECTION


Driver Included:	Yes
Driver Model:	Constant Current
Driver Type:	Built-in
Connection (type):	3-phase DALI adapter
Through Wiring:	No
Strain Relief:	Yes
Operating Temperature:	-20...+40
Max. Tc (°C):	85
Dimmable:	Yes
Type of Dimming:	DALI
Memory Function Power Failure:	No
Standby Power:	3,2
Fuse B10 (pcs):	14
Fuse B16 (pcs):	22
Fuse C10 (pcs):	23
Fuse C16 (pcs):	37

COLOR AND MATERIAL

Material:	Diecasted, Extruded, Aluminium
Color:	White
Color Code (RAL):	9016
Color Cover Ring:	Black
Color Code Cover Ring (RAL):	9017
Halogen free:	No

MEASUREMENT AND INSTALLATION

Operation Environment:	Indoor
IP Degree of Protection:	20
Installation:	Surface mounted
Mounting Installation:	3-Phase DALI adapter
Approval Marks:	CE
Filament Test IEC 695-2-1(°C):	650
Protection Class:	I
Width (mm):	96
Height (mm):	185
Depth (mm):	141
Diameter (mm):	96
Weight (kg):	1,145

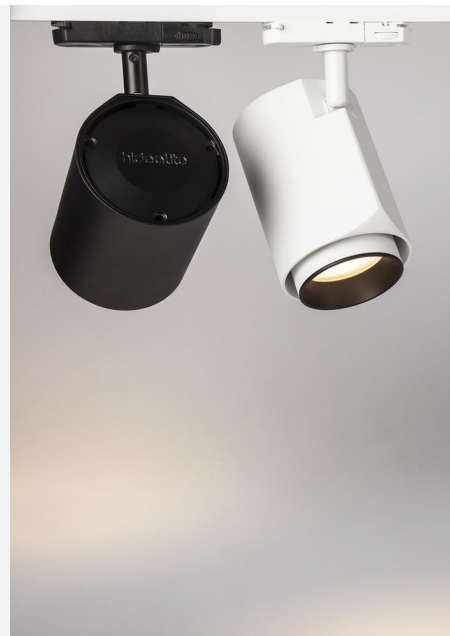

This LED tracklight contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

hidealite Focus Track Giga DALI

874/2012

LED

