



A+

DESCRIPTION

GTIN: 7392971131788
Warranty: 5 years

LIGHT TECHNICAL DATA

Light Source:	LED
Light Source Included (type):	LED not exchangeable
LED Colour:	Warm White
Colour Temperature (K):	3000
Colour Rendering Index (Ra):	>90
Colour Consistency (SDCM):	3
Luminous Intensity (cd):	960
Luminaire Lumen (lm):	570
Beam Angle (°):	36
Light sharing:	Symmetric
Light Outlet:	Direct
Number of Lamps (pcs):	1
Number of LED (pcs):	1
Life Time:	(L70 B10) 50 000h Ta 45 °C
Nominal Life Time (h):	50000
Life Time Driver:	50 000h/10%

TECHNICAL DATA

Adjustable:	Yes
Tilttable (°):	30
Rotatable (°):	360
Voltage (type):	AC
Voltage Interval (V):	220...240
Voltage Nominal (V):	230
Line Frequency (Hz):	50
Power LED (W):	6,5
Power Luminaire (W):	7,5
System Power (W):	7,5
Efficiency LED (lm/W):	88
Efficiency Luminaire (lm/W):	76
Efficiency System (lm/W):	76
Energy Efficiency Class:	A+

OPERATION AND CONNECTION

Driver Included:	Yes
Driver Model:	Constant Current
Driver Type:	Stand Alone
Connection (type):	Quick Terminal
Connection (mm ²):	3x0,5-2,5
Through Wiring:	Yes
Strain Relief:	Yes
Protection Against:	Short Circuit, Overheating 100°C, Overload
Operating Temperature:	-20...+45
Max. Tc (°C):	70
Dimmable:	Yes
Type of Dimming:	Trailing Edge, Leading Edge
Fuse B10 (pcs):	55
Fuse B16 (pcs):	88
Fuse C10 (pcs):	91
Fuse C16 (pcs):	147

COLOR AND MATERIAL


Material:	Aluminium, Plastic
Color:	White
Color Code (RAL):	9016

MEASUREMENT AND INSTALLATION


Operation Environment:	Indoor
IP Degree of Protection:	44
Installation:	Built-in
Mounting Installation:	Tension Spring
Ceiling Thickness Interval (mm):	3-26
Fire Safety Marks:	Approved for installation in insulation
Protection Cover:	7466700, 7466701, 7466702
Approval Marks:	CE, SELV
Protection Class:	II
Height (mm):	59
Diameter (mm):	95
Weight (kg):	0,45
Min. Built-in (mm):	200x200x56
Height Recessed Part (mm):	56
Height Exterior Part (mm):	3
Min. Built-in (Ø mm):	83
Max. Built-in (Ø mm):	83




(mm)

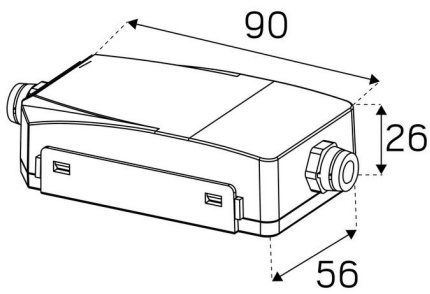

(mm)

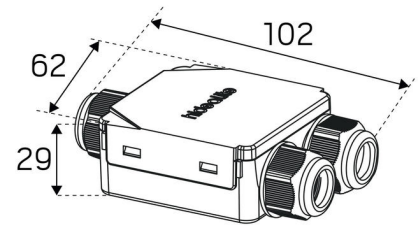

(mm)

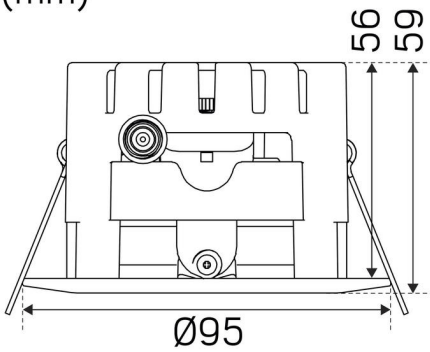

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

hideolite Optic 360 Iso

874/2012

