



OPTIC BOX II WHITE TUNE

Complete 230V downlight in box-design with reflector technology and phase dimmable driver. With its square design, fits very well in both private and public environments which require a discrete and comfortable general light. Comes in several colour temperatures and Tune. Very good colour rendering, Ra>95. Can be installed under moisture barrier with our Spot Guard Gles. Complete with phase dimmable driver with push-in terminal and screwless strain relief. Dimmable with the most commonly available dimmers on the market. Can be delivered with Converter DALI.

DESCRIPTION

GTIN:	7392971137469
Item Name:	Optic Box II White Tune
Warranty:	5 years

LIGHT TECHNICAL DATA

Max. Luminaire Lumen (lm):	930
Light Source:	LED
Light Source Included:	Yes
Replaceability:	Non-replaceable LED, Replaceable Control gear by professional
LED Colour:	Tune
Colour Temperature (K):	2700
Range Colour Temperature (K):	Tune 2000-2700
Colour Rendering Index (Ra):	>95
Colour Consistency (SDCM):	3
Luminous Intensity (cd):	2x800
Beam Angle (°):	36
Light sharing:	Symmetric
Light Outlet:	Direct
Number of Lamps (pcs):	2
Number of LED (pcs):	2
Life Time:	L80 100000h Ta 25°C
Nominal Life Time (h):	100000
Life Time Driver:	50 000h/10%
Flicker (PstLM):	0,003
Stroboscopic effect (SVM):	0,004

TECHNICAL DATA

Adjustable:	Yes
Tiltable (°):	25
Rotatable (°):	360
Voltage (type):	AC
Voltage Interval (V):	220...240V
Voltage Nominal (V):	230
Line Frequency (Hz):	50, 60
Power LED (W):	12,5
Max. Power Luminaire (W):	15
Max. System Power (W):	15
Max. Efficiency Luminaire (lm/W):	62
Max. Efficiency System (lm/W):	62
Containing light source energy efficiency class (EU) 2019/2015: F	
Eprel registration number:	1023985

OPERATION AND CONNECTION

Dimmable:	Yes
Type of Dimming:	Trailing Edge, Leading Edge
Driver Included:	Yes
Driver Model:	Constant Current
Driver Type:	Stand Alone
Connection (type):	Quick Terminal
Connection (mm ²):	3x0,5-2,5
Through Wiring:	Yes
Strain Relief:	Yes
Power Factor λ :	0,9
Efficiency (%):	80
Constant Current (mA):	350
Min. Ta (°C):	-20
Max. Ta (°C):	40
Max. Tc (°C):	85
Dimming secondary side:	AM
Protection Against:	Short Circuit, Overheating 110°C, Overload
Fuse B10 (pcs):	25
Fuse B16 (pcs):	40
Fuse C10 (pcs):	45
Fuse C16 (pcs):	70

COLOR AND MATERIAL


Material:	Aluminium
Color:	White
Environmental Assessment:	Byggarubedömningen

MEASUREMENT AND INSTALLATION

Operating Environment:	Indoor / damp locations
IP Degree of Protection:	21
Protection Class:	II
Installation:	Built-in
Mounting Installation:	Mounting Spring
Ceiling Thickness Interval (mm):	3-26mm
Fire Safety Marks:	Not in insulation without protection cover
Protection Cover:	7466700, 7466701, 7466702
Approval Marks:	CE, SELV
Filament Test IEC 695-2-1(°C):	650
Length (mm):	179
Width (mm):	101
Height (mm):	63
Weight (kg):	0,705
Min. Built-in (mm):	300x230x70
Height Recessed Part (mm):	60
Height Exterior Part (mm):	3
Built-in LxB (mm):	168x88



(mm)

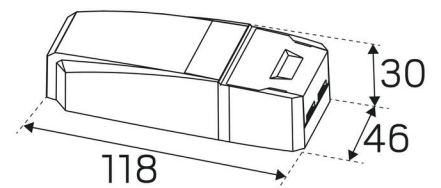

(mm)

