

## LED EXTEND G2 CORNER 2700K

LED strip in 90° angle of white enamelled aluminium with a high lumen output and an even homogenous light. Perfect alternative to fluorescent lights and spotlights for under cabinet lighting. Mounted with double-sided tape and screws, alternatively with concealed clips. Can be linked together up to 4m with link pins or linking cables. Comes with 2m connecting cable, 25cm linking cable, link pins and brackets. Connects to LED-trafo 24VDC. Linkable touch dimmer, connection block and USB charger available as accessory.

### DESCRIPTION

<b>GTIN:</b>	7392971132594
<b>Item Name:</b>	LED Extend G2 Corner 2700K
<b>Warranty:</b>	5 years

### LIGHT TECHNICAL DATA

<b>Max. Luminaire Lumen (lm):</b>	55
<b>Light Source:</b>	LED
<b>Replaceability:</b>	Non-replaceable LED
<b>LED Colour:</b>	Warm White
<b>Colour Temperature (K):</b>	2700
<b>Colour Rendering Index (Ra):</b>	>90
<b>Colour Consistency (SDCM):</b>	3
<b>Luminous Intensity (cd):</b>	20
<b>Beam Angle (°):</b>	110
<b>Light sharing:</b>	Symmetric
<b>Light Outlet:</b>	Direct
<b>Number of Lamps (pcs):</b>	1
<b>Number of LED (pcs):</b>	7
<b>Life Time:</b>	L70 90000h Ta 25°C
<b>Nominal Life Time (h):</b>	90000

## TECHNICAL DATA

Voltage (type):	DC
Voltage Interval (V):	24...24V
Voltage Nominal (V):	24
Power LED (W):	1
Max. Power Luminaire (W):	1
Max. System Power (W):	1,1
Max. Efficiency Luminaire (lm/W):	55
Max. Efficiency System (lm/W):	50,0
Eprel registration number:	1364603

## OPERATION AND CONNECTION


Dimmable:	Yes
Driver Included:	No
Driver Model:	Constant Voltage
Connection (type):	Plug-in
Length Connection (cm):	200
Min. Ta (°C):	-25
Max. Ta (°C):	45
Max. Tc (°C):	50

## COLOR AND MATERIAL

Material:	Aluminium
Color:	White
Environmental Assessment:	Byggvarubedömningen

## MEASUREMENT AND INSTALLATION

Operating Environment:	Indoor / dry locations
IP Degree of Protection:	21
Protection Class:	III
Installation:	Surface mounted
Mounting Installation:	Screw Mounting, Self Adhesive Tape
Approval Marks:	CE
Filament Test IEC 695-2-1(°C):	650
Length (mm):	50
Width (mm):	19
Height (mm):	16
Weight (kg):	0,08

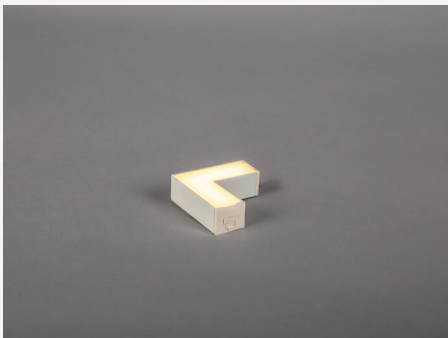

(mm)

